


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66(UL 94V-0)
 Applicable Terminal: FT25007

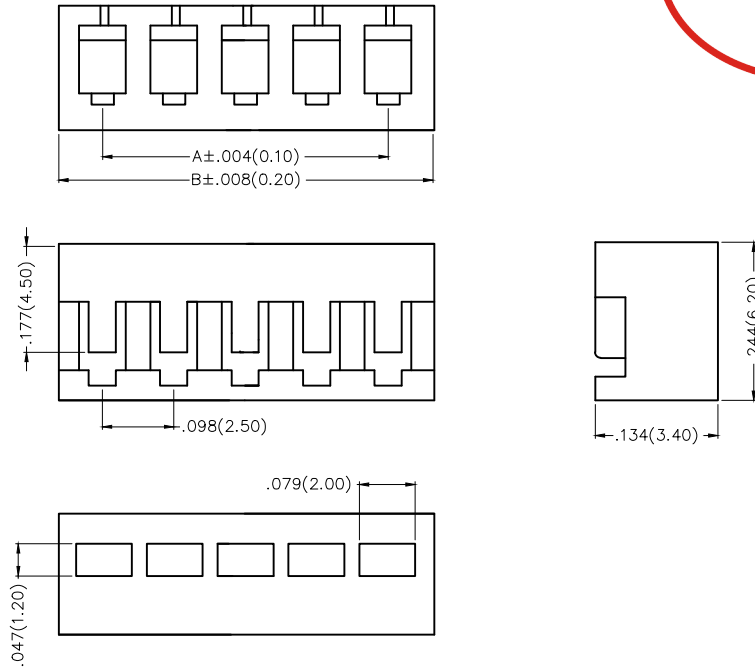


Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
2	FHG25008-S02M2W1B	.098(2.50)	.217(5.50)
3	FHG25008-S03M2W1B	.197(5.00)	.315(8.00)
4	FHG25008-S04M2W1B	.295(7.50)	.413(10.50)
5	FHG25008-S05M2W1B	.394(10.00)	.512(13.00)
6	FHG25008-S06M2W1B	.492(12.50)	.610(15.50)
7	FHG25008-S07M2W1B	.591(15.00)	.709(18.00)
8	FHG25008-S08M2W1B	.689(17.50)	.807(20.50)
9	FHG25008-S09M2W1B	.787(20.00)	.906(23.00)
10	FHG25008-S10M2W1B	.886(22.50)	1.004(25.50)
11	FHG25008-S11M2W1B	.984(25.00)	1.102(28.00)
12	FHG25008-S12M2W1B	1.083(27.50)	1.201(30.50)
13	FHG25008-S13M2W1B	1.181(30.00)	1.299(33.00)
14	FHG25008-S14M2W1B	1.280(32.50)	1.398(35.50)
15	FHG25008-S15M2W1B	1.378(35.00)	1.496(38.00)

Ordering Information

FHG 250 08 - S XX M 2 W1 B
 1 2 3 4 5 6 7 8 9

1	Category FHG-Housing	2	Series Number 250-Pitch2.50mm	3	Distinction No. 08	4	Row Option S-Single Row		
5	Circuits XX	6	Type M-Male	7	Material-Resin 2-PA66	8	Color-Resin W1-White	9	Packaging B-PE Bag



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 11/JUN/13	PART NO. FHG25008-SXXM2W1B	ITEM NO. FHG25008		
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X'±5' .X'±2' .XX'±1" .XXX'±0.5'	CHECKED BY FAN	DATE 11/JUN/13	TITLE Wire to Board Pitch 2.50mm(Housing)		REV 0
SCALE 5:1	SIZE A4		DRAWN BY CHERRY	DATE 11/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			