


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical
Temperature Range—Operating: -25°C~+85°C
Material
Housing: PA66 (UL 94V-2)
Applicable Terminal: FT25013
Mates With(Housing): FHG25012 Series



Circuits (n)	Part No.	Dimensions(in/mm)		
		A	B	C
2	FHG25013-S02F2W1B	.098(2.50)	.240(6.10)	.311(7.90)
3	FHG25013-S03F2W1B	.197(5.00)	.335(8.50)	.409(10.40)
4	FHG25013-S04F2W1B	.295(7.50)	.437(11.10)	.508(12.90)
5	FHG25013-S05F2W1B	.394(10.00)	.535(13.60)	.606(15.40)
6	FHG25013-S06F2W1B	.492(12.50)	.634(16.10)	.705(17.90)
7	FHG25013-S07F2W1B	.591(15.00)	.732(18.60)	.803(20.40)
8	FHG25013-S08F2W1B	.689(17.50)	.831(21.10)	.902(22.90)
9	FHG25013-S09F2W1B	.787(20.00)	.929(23.60)	1.00(25.40)
10	FHG25013-S10F2W1B	.886(22.50)	1.028(26.10)	1.098(27.90)

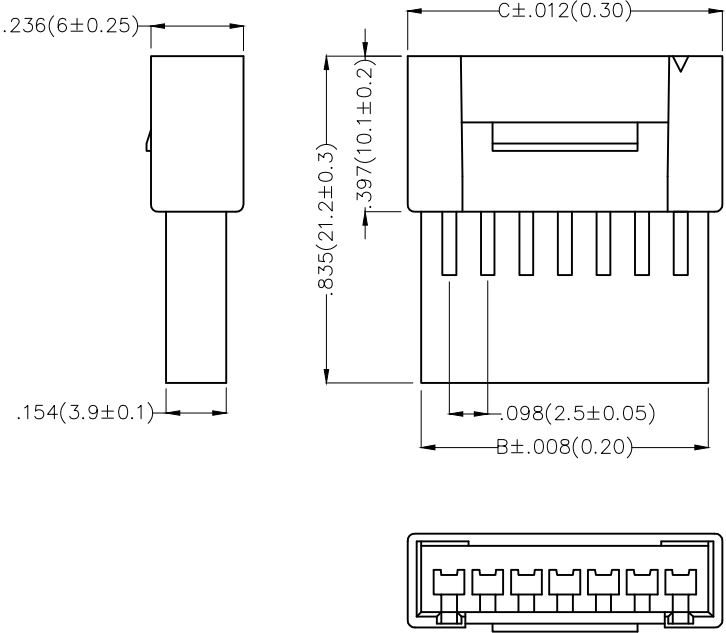

Ordering Information

FHG 250 13 — S XX F 2 W1 B
1 2 3 4 5 6 7 8 9

1	Category	2	Series Number	3	Distinction No.	4	Row Option		
	FHG—Housing		250—Pitch2.50mm		13		S—Single Row		
5	Circuits	6	Type	7	Material—Resin	8	Color—Resin	9	Packaging
	XX		F—Female		2—PA66		W1—White		B—PE Bag



 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUL/13	PART NO. FHG25013-SXXF2W1B		ITEM NO. FHG25013	 3K-KAMING ®	
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X'±5"	CHECKED BY	DATE	TITLE Wire to Wire Pitch 2.50mm(Housing)		REV 0	SHEET NO. 1/1	
		X.X±.008(0.20)	X'±2"	JACOB	25/JUL/13					
		X.XX±.006(0.15)	.XX'±1"	DRAWN BY	DATE					
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5"	CHERRY	25/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
4		5		6		7		8		