
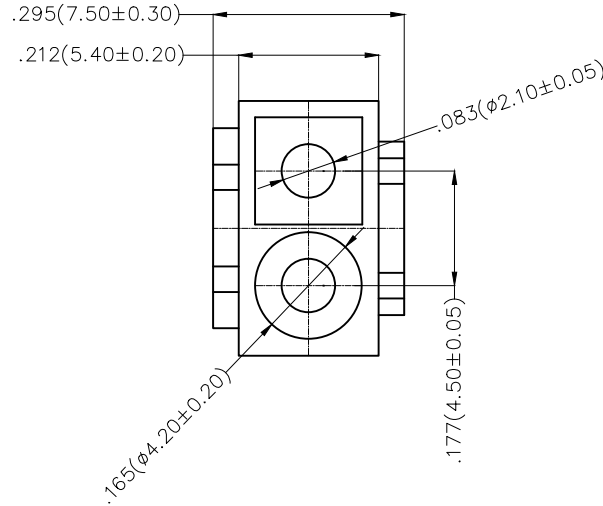
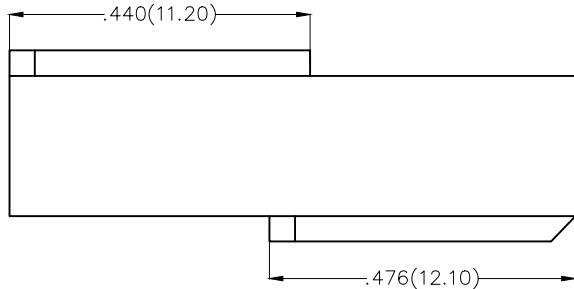


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

1. Material: PA66 (UL 94V-0)
2. Temperature Range-Operating: -25°C ~ +85°C
3. Applicable Terminal: FT45003
4. Mates With: FHG45004 Series.

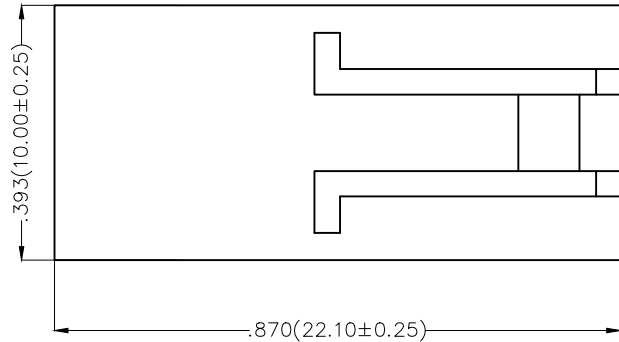

Ordering Information

FHG 450 03 — S 02 F 2 W5 B
 1 2 3 4 5 6 7 8 9

1	Category FHG-Housing	2	Series Number 450-Pitch 4.50mm	3	Distinction No. 03	4	Row Option S-Single Row		
5	Circuits 02	6	Entry Type F-Female	7	Material-Resin 2-PA66	8	Color-Resin W5-Natural	9	Packaging B-PE Bag



<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/AUG/15	PART NO. FHG45003-S02F2W5B	ITEM NO. FHG45003	<p>3K-KAMING</p>	
	DESIGN UNITS Inch (metric)	X.X±.012(0.30) X.XX±.008(0.20)	X.±5° .X'±2°	CHECKED BY CHERRY	DATE 18/AUG/15	TITLE Wire to Wire Pitch 4.5mm(Housing)		REV 0
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX'±1° .XXX'±0.5°	DRAWN BY KEVIN	DATE 18/AUG/15	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		