
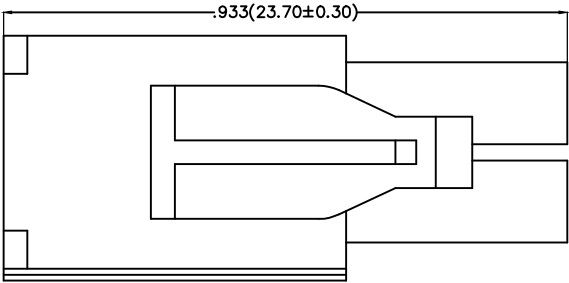
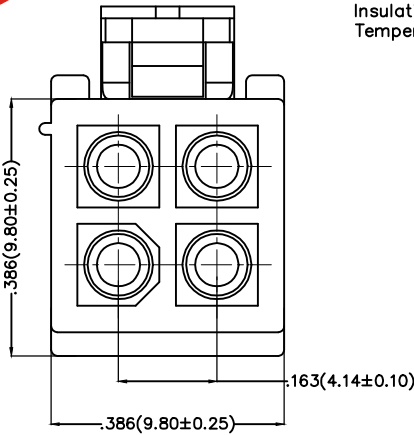


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

- 1.Material: Ny66 UL94V-0
2.Temperature Range-Operating: -25C° ~ +85C°
3.Applicable Terminal: FT41402-F2H
Current Rating: 4A AC, DC
Voltage Rating: 250V AC, DC
Withstanding Voltage:1500V AC/minute
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Temperature Range: -25C° ~ +85C°

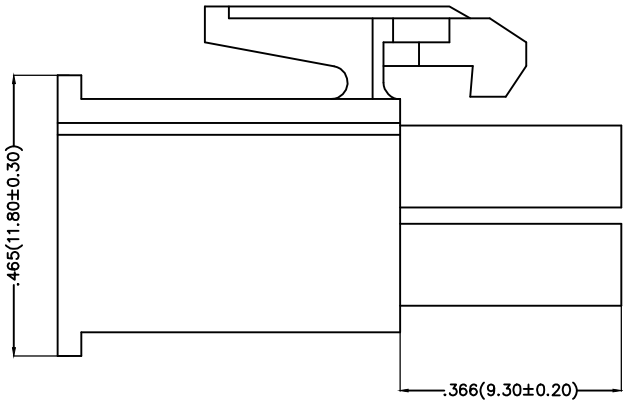

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG41402-D04M2W1B	ITEM NO. FHG41402	 3K-KAMING®	
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE Wire to Board Pitch 4.14mm(Housing)		REV 0	SHEET NO. 1/1
		X.X±.008(0.20)	X.±2°	CHERRY	25/JUN/13				
		X.XX±.006(0.15)	X.X°±1°						
SCALE 5:1	SIZE A4	X.XX±.004(0.10)	X.XX°±0.5°	DRAWN BY KEVIN	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
4		5		6		7		8	