




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

1. Electrical
Current Rating: 5A AC/DC
Voltage Rating: 300V AC/DC
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Temperature Range—Operating: -25°C~+85°C
2. Material
PA66 UL94V-2, Transparent
3. Applicable Terminal: FT41403-F2H, FT41404-M2H
4. Mates With: FHG41404-D04F2TB

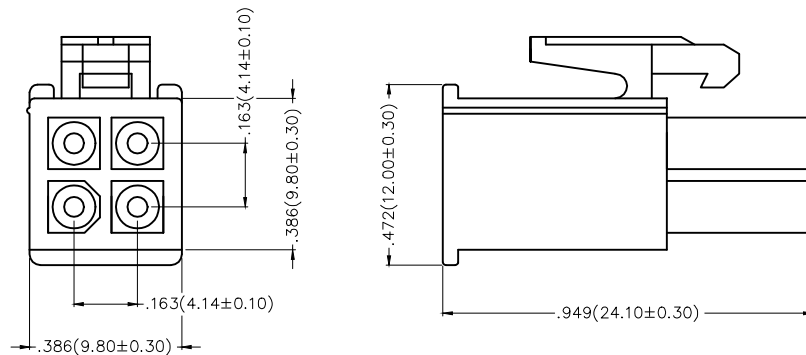




 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 21/SEP/16	PART NO. FHG41403-D04M2TB	ITEM NO. FHG41403	 3K-KAMING®		
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.'±5"	CHECKED BY CHERRY	DATE 21/SEP/16	TITLE Wire to Wire(Housing) Pitch 4.14mm Double row 4Circuits				REV 0
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1"	DRAWN BY KATE	DATE 21/SEP/16	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

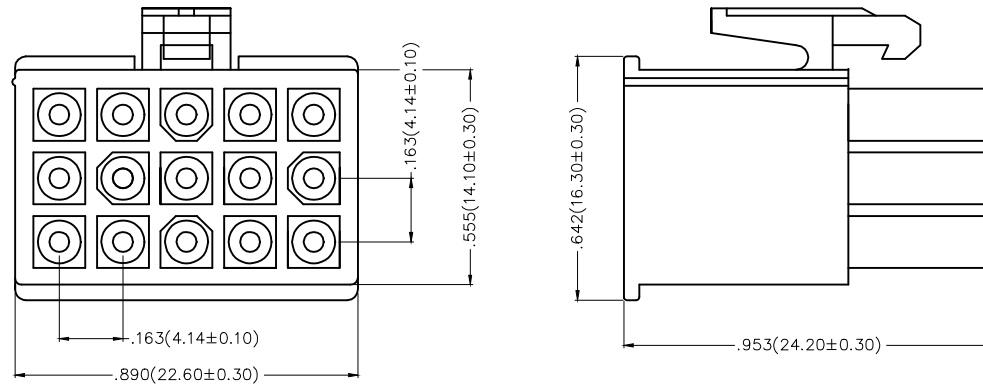1. Electrical
Current Rating: 5A AC/DC
Voltage Rating: 300V AC/DC
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Temperature Range—Operating: -25°C~+85°C
2. Material
PA66 UL94V-2, Transparent
3. Applicable Terminal: FT41403-F2H, FT41404-M2H
4. Mates With: FHG41404-T15F2TB



 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 21/SEP/16	PART NO. FHG41403-T15M2TB	ITEM NO. FHG41403	 3K-KAMING®		
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 21/SEP/16	TITLE Wire to Wire(Housing) Pitch 4.14mm Three row 15Circuits				REV 0
		X.XX±.006(0.15)	.XX±1°	DRAWN BY KATE	DATE 21/SEP/16	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)		.XXX±0.5°						