


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66 (UL 94V-2) Transparent
 Applicable Terminal: FT50301
 Mates With(Housing): FHG50302 Series.

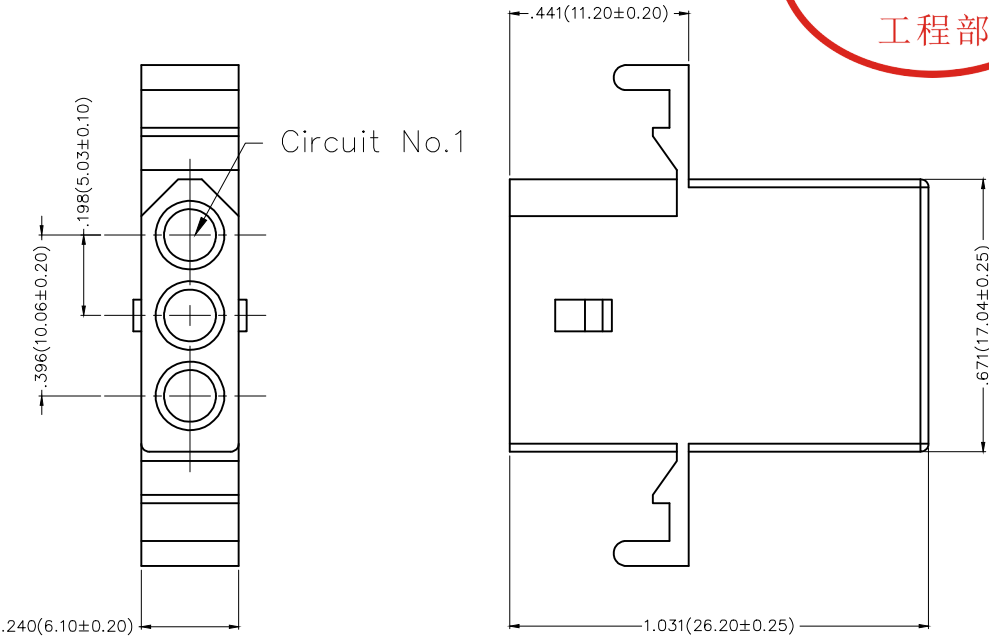

Ordering Information


FHG 503 01 — S 03 F 2 T B
 1 2 3 4 5 6 7 8 9

1	Category FHG—Housing	2	Series Number 503—Pitch5.03mm	3	Distinction No. 01	4	Row Option S—Single Row	5	Circuits 03
6	Entry Type F—Female	7	Material—Resin 2—PA66	8	Color—Resin T—Transparent	9	Packaging B—PE Bag		





 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FHG50301—S03F2TB	ITEM NO. FHG50301	 3K-KAMING®
	X.±.012(0.30)	.X'±5'	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE Wire to Wire Pitch 5.03mm(Housing)		
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	DRAWN BY KATE	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX±1"				
		X.XXX±.004(0.10)	.XXX±0.5'				

REV	LOCATIONS	DESCRIPTION	DATE	REVISOR	APPD

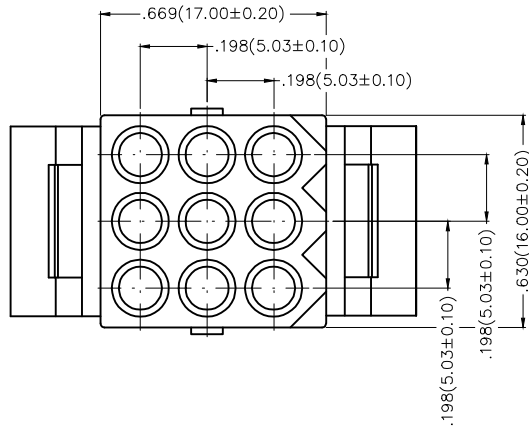

Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66 (UL 94V-2) Transparent
 Applicable Terminal: FT50301

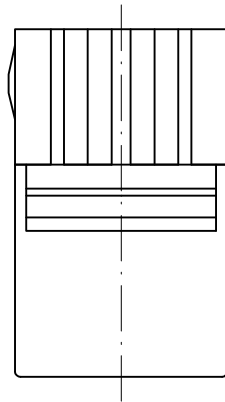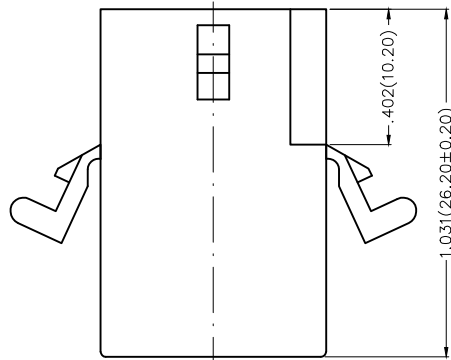

Ordering Information


FHG 503 01 — T 09 F 2 T B
 1 2 3 4 5 6 7 8 9

1	Category FHG—Housing	2	Series Number 503—Pitch5.03mm	3	Distinction No. 01	4	Row Option T—Three Row	5	Circuits 09
6	Entry Type F—Female	7	Material—Resin 2—PA66	8	Color—Resin T—Transparent	9	Packaging B—PE Bag		





 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FHG50301—T09F2TB	ITEM NO. FHG50301	 3K-KAMING
	X.±.012(0.30)	X'.±5'	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE Wire to Wire Pitch 5.03mm(Housing)		
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	DRAWN BY KATE	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1'				
		X.XXX±.004(0.10)	.XXX'±0.5'				

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

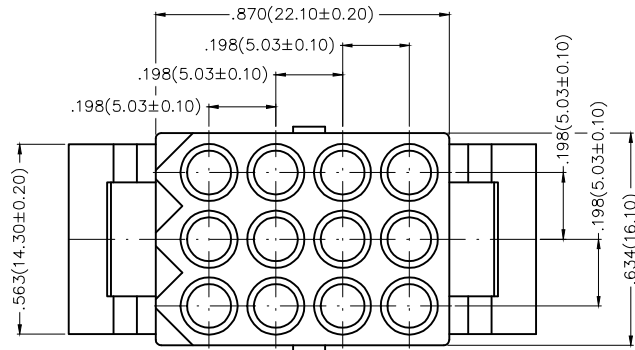

Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66 (UL 94V-2) Transparent
 Applicable Terminal: FT50301

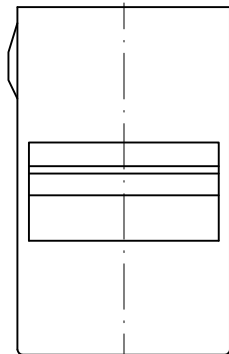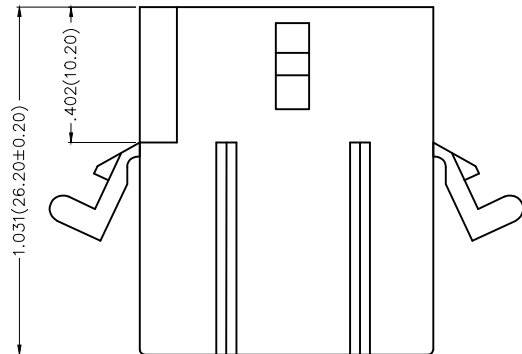

Ordering Information

FHG 503 01 — T 12 F 2 T B
 1 2 3 4 5 6 7 8 9

1	Category FHG—Housing	2	Series Number 503—Pitch5.03mm	3	Distinction No. 01	4	Row Option T—Three Row	5	Circuits 12
6	Entry Type F—Female	7	Material—Resin 2—PA66	8	Color—Resin T—Transparent	9	Packaging B—PE Bag		



 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FHG50301—T12F2TB	ITEM NO. FHG50301	 3K-KAMING®
	X.±.012(0.30)	.X'±5'	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE Wire to Wire Pitch 5.03mm(Housing)		
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	DRAWN BY KATE	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1'				
		X.XXX±.004(0.10)	.XXX'±0.5'				