





REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD





Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66 (UL 94V-0)
 Applicable Terminal: T62001-F2H
 Mates With: FHG62005 Series



1 Pin





2 Pin

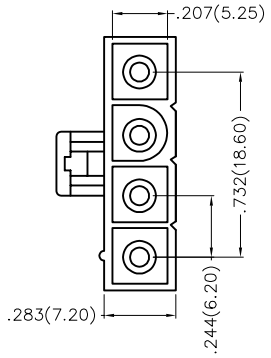

4 Pin

Circuits (n)	Part No.
1	FHG62001-S01M2TB
2	FHG62001-S02M2TB
3	FHG62001-S03M2TB
4	FHG62001-S04M2TB



3 Pin



Ordering Information

FHG 620 01 — S XX M 2 T B
 1 2 3 4 5 6 7 8 9

1	Category FHG—Housing	2	Series Number 620—Pitch6.20mm	3	Distinction No. 01	4	Row Option S—Single Row		
5	Circuits XX	6	Type M—Male	7	Material—Resin 2—PA66	8	Color—Resin T—Transparent	9	Packaging B—PE Bag

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FHG62001-SXXM2TB	ITEM NO. FHG62001	 3K-KAMING®
	X.±.012(0.30)	X.*5'	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE Wire to Wire Pitch 6.2mm(Housing)		
	X.X±.008(0.20)	.X*±2'	DRAWN BY KATE	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1/1
	X.XX±.006(0.15)	.XX*±1'					
	X.XXX±.004(0.10)	.XXX*±0.5'					