



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

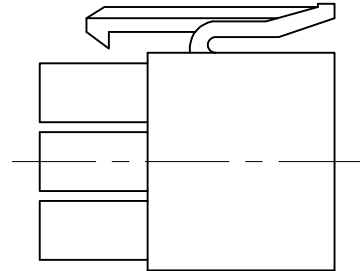

Electrical
 Temperature Range—Operating: -25°C~+85°C
 Material
 Housing: PA66 (UL 94V-0)
 Applicable Terminal: FT62006-F2H
 Mates With: FHG62004 Series

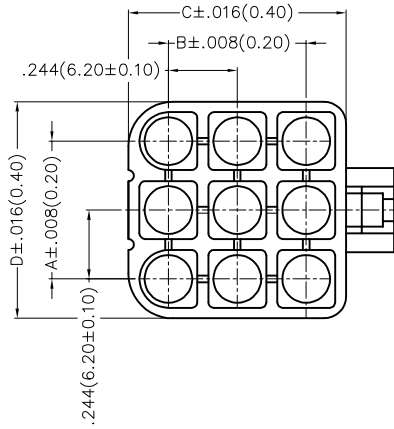

Circuits (n)	Part No.	Dimensions(in/mm)			
		A	B	C	D
2	FHG62006-S02M2TB	.244(6.20)	-	.283(7.20)	.528(13.40)
3	FHG62006-S03M2TB	.488(12.40)	-	.283(7.20)	.772(19.60)
4	FHG62006-D04M2TB	.244(6.20)	.244(6.20)	.528(13.40)	.528(13.40)
6	FHG62006-D06M2TB	.488(12.40)	.244(6.20)	.528(13.40)	.772(19.60)
9	FHG62006-T09M2TB	.488(12.40)	.488(12.40)	.772(19.60)	.772(19.60)
12	FHG62006-T12M2TB	.732(18.60)	.488(12.40)	.772(19.60)	1.016(25.80)
15	FHG62006-T15M2TB	.976(24.80)	.488(12.40)	.772(19.60)	1.260(32.00)

Ordering Information

FHG 620 06 - X XX M 2 T B
 1 2 3 4 5 6 7 8 9

1	Category FHG-Housing	2	Series Number 620-Pitch6.20mm	3	Distinction No. 06	4	Row Option S-Single Row D-Double Row T-Triple Row		
5	Circuits XX	6	Type M-Male	7	Material-Resin 2-PA66	8	Color-Resin T-Transparent	9	Packaging B-PE Bag



 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A<	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FHG62006-XXXM2TB	ITEM NO. FHG62006	 3K-KAMING REV 0 SHEET NO. 1/1
	X.±.012(0.30)	X'±5'	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE Wire to Wire Pitch 6.2mm(Housing)		
	X.X±.008(0.20)	.X'±2'	DRAWN BY KATE	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XX±.006(0.15)	.XX'±1'					
	X.XXX±.004(0.10)	.XXX'±0.5'					