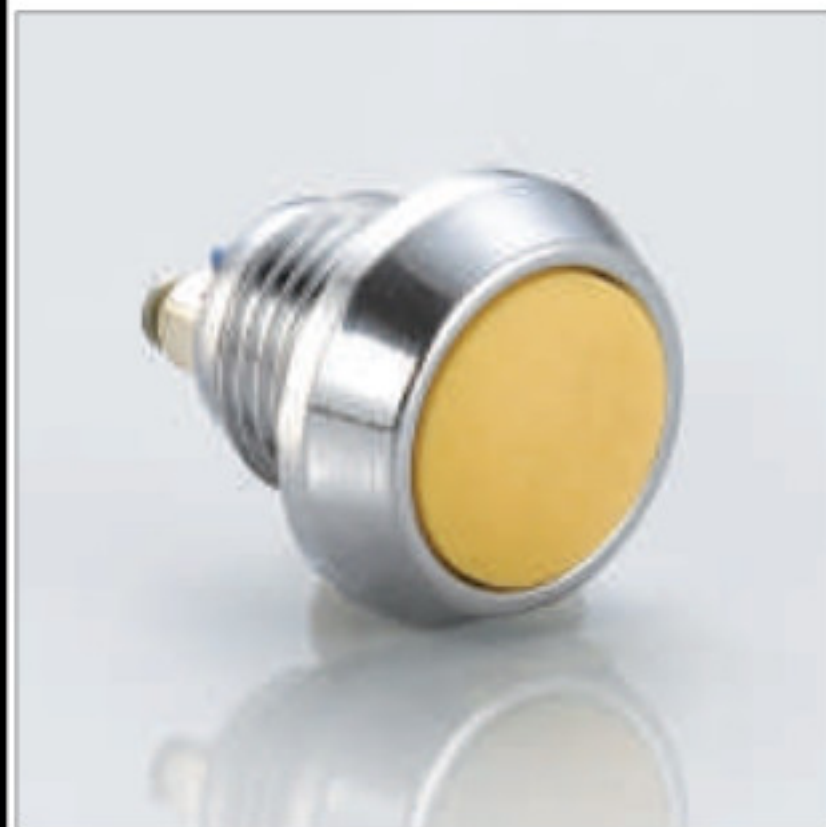



 3K-KAMING		东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd					
主要技术参数 Technical Parameter							
保护等级/Degree of Protection		IP67					
触点类型/Contact Type		1 NO/1NC 可定制					
最大电压/Maximum Voltage		250V AC/DC					
热流/Thermal Current		2A					
最小负载/Minimum Applicable Load		5V AC/DC, 1mA					
触点材料/Contact material		Silver plated					
端子形式/Terminal Style		.110" Solder/ Quick Connect					
运行温度/Operating Temperature		-25° to +55℃					
操作湿度/Operating Humidity		45 to 85% RH					
接触电阻/Contact Resistance		50MΩmaximum					
绝缘电阻/Insulation Resistance		100MΩminimum (500V DC megger)					
震荡电阻/Vibration Resistance		10 to 55Hz, amplitude 1.2mm p-p					
保护等级/Degree of Protection		>10g					
电气寿命/Electrical Life		100,000 operations minimum (at full rated load)					
机械寿命/Mechanical Life		Maintained: 1,000,000 operations minimum Momentary: 1,000,000 operations minimum					
耐压/Dielectrical Life		Switch Unit: 2,000V AC, 1 min. between live/dead part and terminals of different poles; 1,000V AC, 1 minute between terminals of the same pole; 1,500V AC, 1 minute between contact and lamp terminals. Illumination Unit: 2,000V AC, 1 min. between live part/ground					
锡焊温度/Soldering Temperature		20W/5 seconds or 260℃/3 seconds					
注：* 详细型号分类参考(金属按钮开关命名方式表)							
Ø12经济型金属按钮 Metal Waterproof Push Button Switch							
名称/外观 Product appearance	安装方式 Install Style	操作类别 Operation	触点 Contact	产品型号 Model	颜色 Color	额定电压 Rated Voltage	外壳材料 Crust Material
弧面圆形 / Domed round 	螺丝型 Screw Type	自复 Momentary	1NO+1NC	EJ12-231AS	■ 红色/Red ■ 绿色/Green ■ 蓝色/Blue ■ 白色/White ■ 黄色/Yellow ■ 金属色/Metal	D:24VDC E:12VDC F:6.3VDC A1:110VAC A2:220VAC	Nil:不锈钢 T:铜镀镍 A:铝 G:铜镀铬 B:铜镀黑色 Nil:Stainless steel T: Copper Plated Ni A: Aluminium G: Copper plated C B: Copper plated with black
弧面圆形 / Domed round 	螺丝型 Screw Type	自复 Momentary	1NO+1NC	EJ12-231AY			
弧面圆形 / Domed round 	焊线型 PCB Type	自复 Momentary	1NO+1NC	EJ12-231PBA			

名称/外观 Product appearance	带灯形式 Illuminated type	操作类别 Operation	触点 Contact	产品型号 Model	颜色 Color	额定电压 Rated Voltage	外壳材料 Crust Material
弧面圆形 / Domed round 	螺丝型 Screw Type	自复 Momentary	1NO+1NC	EJ12-231ARA	R 红色/Red G 绿色/Green B 蓝色/Blue W 白色/White Y 黄色/Yellow S 金属色/Metal	D:24VDC E:12VDC F:6.3VDC A1:110VAC A2:220VAC	Nil:不锈钢 T:铜镀镍 A:铝 G:铜镀铬 B:铜镀黑色 Nil:Stainless steel T: Copper Plated Ni A: Aluminium G: Copper plated C B: Copper plated with black


D:24VDC
E:12VDC
F:6.3VDC
A1:110VAC
A2:220VACNil:不锈钢
T:铜镀镍
A:铝
G:铜镀铬
B:铜镀黑色

Nil:Stainless steel
T: Copper Plated Ni
A: Aluminium
G: Copper plated C
B: Copper plated with black


弧钮螺丝型

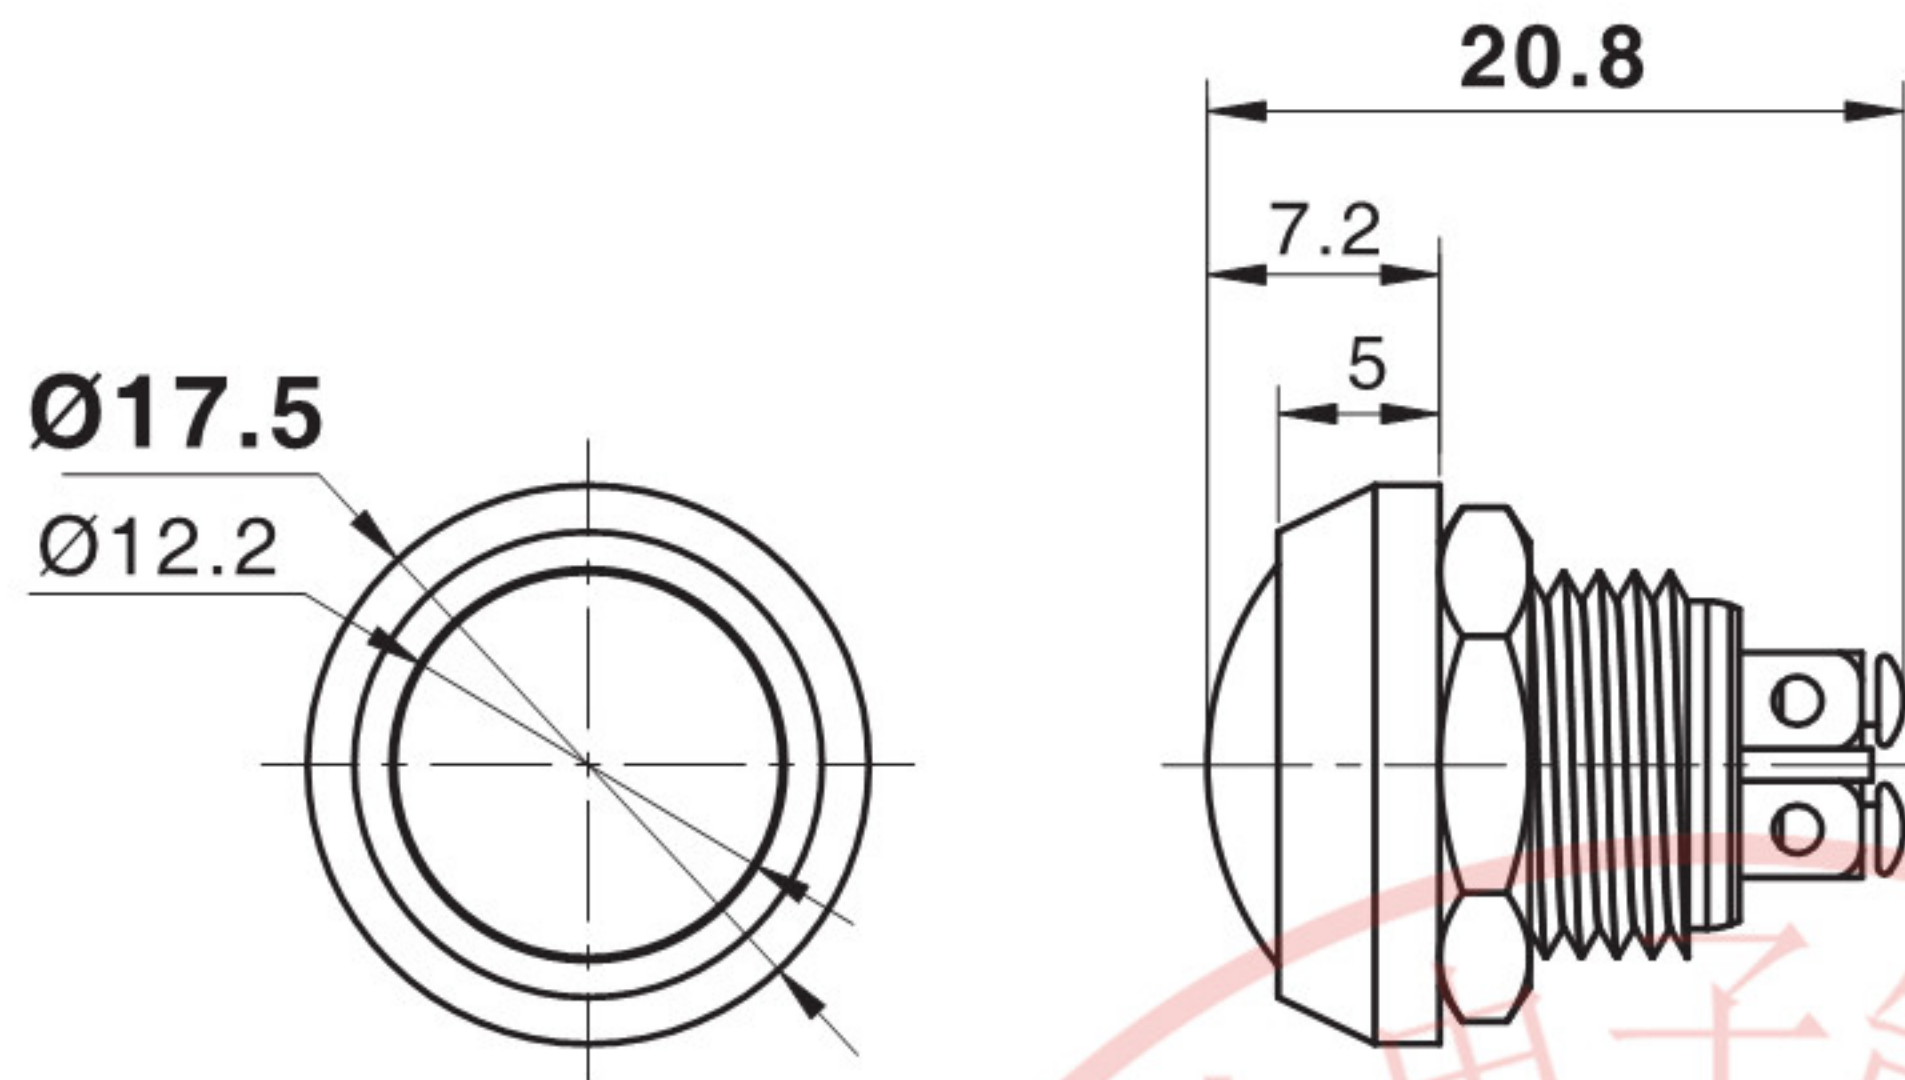


弧钮螺丝型

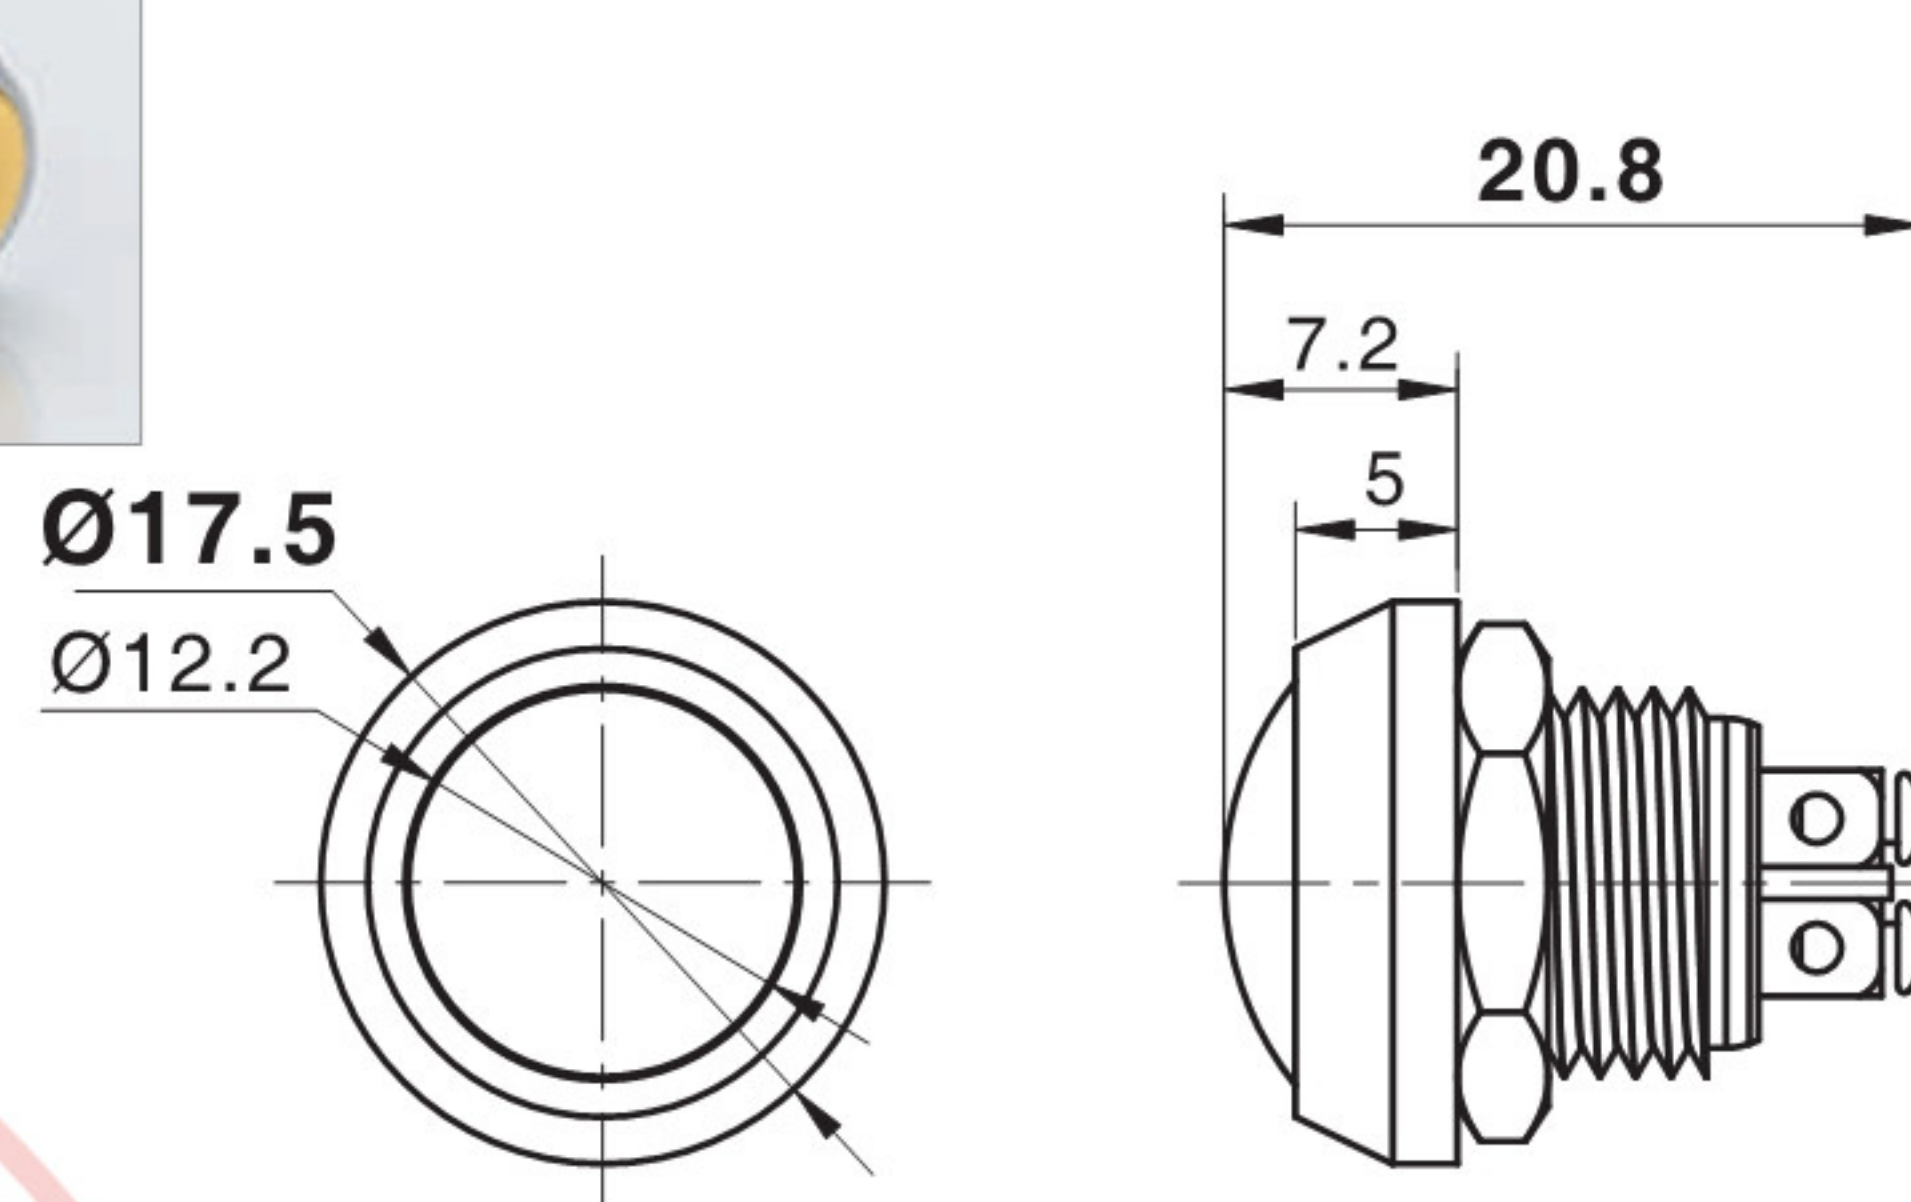

弧钮焊线型(铝)

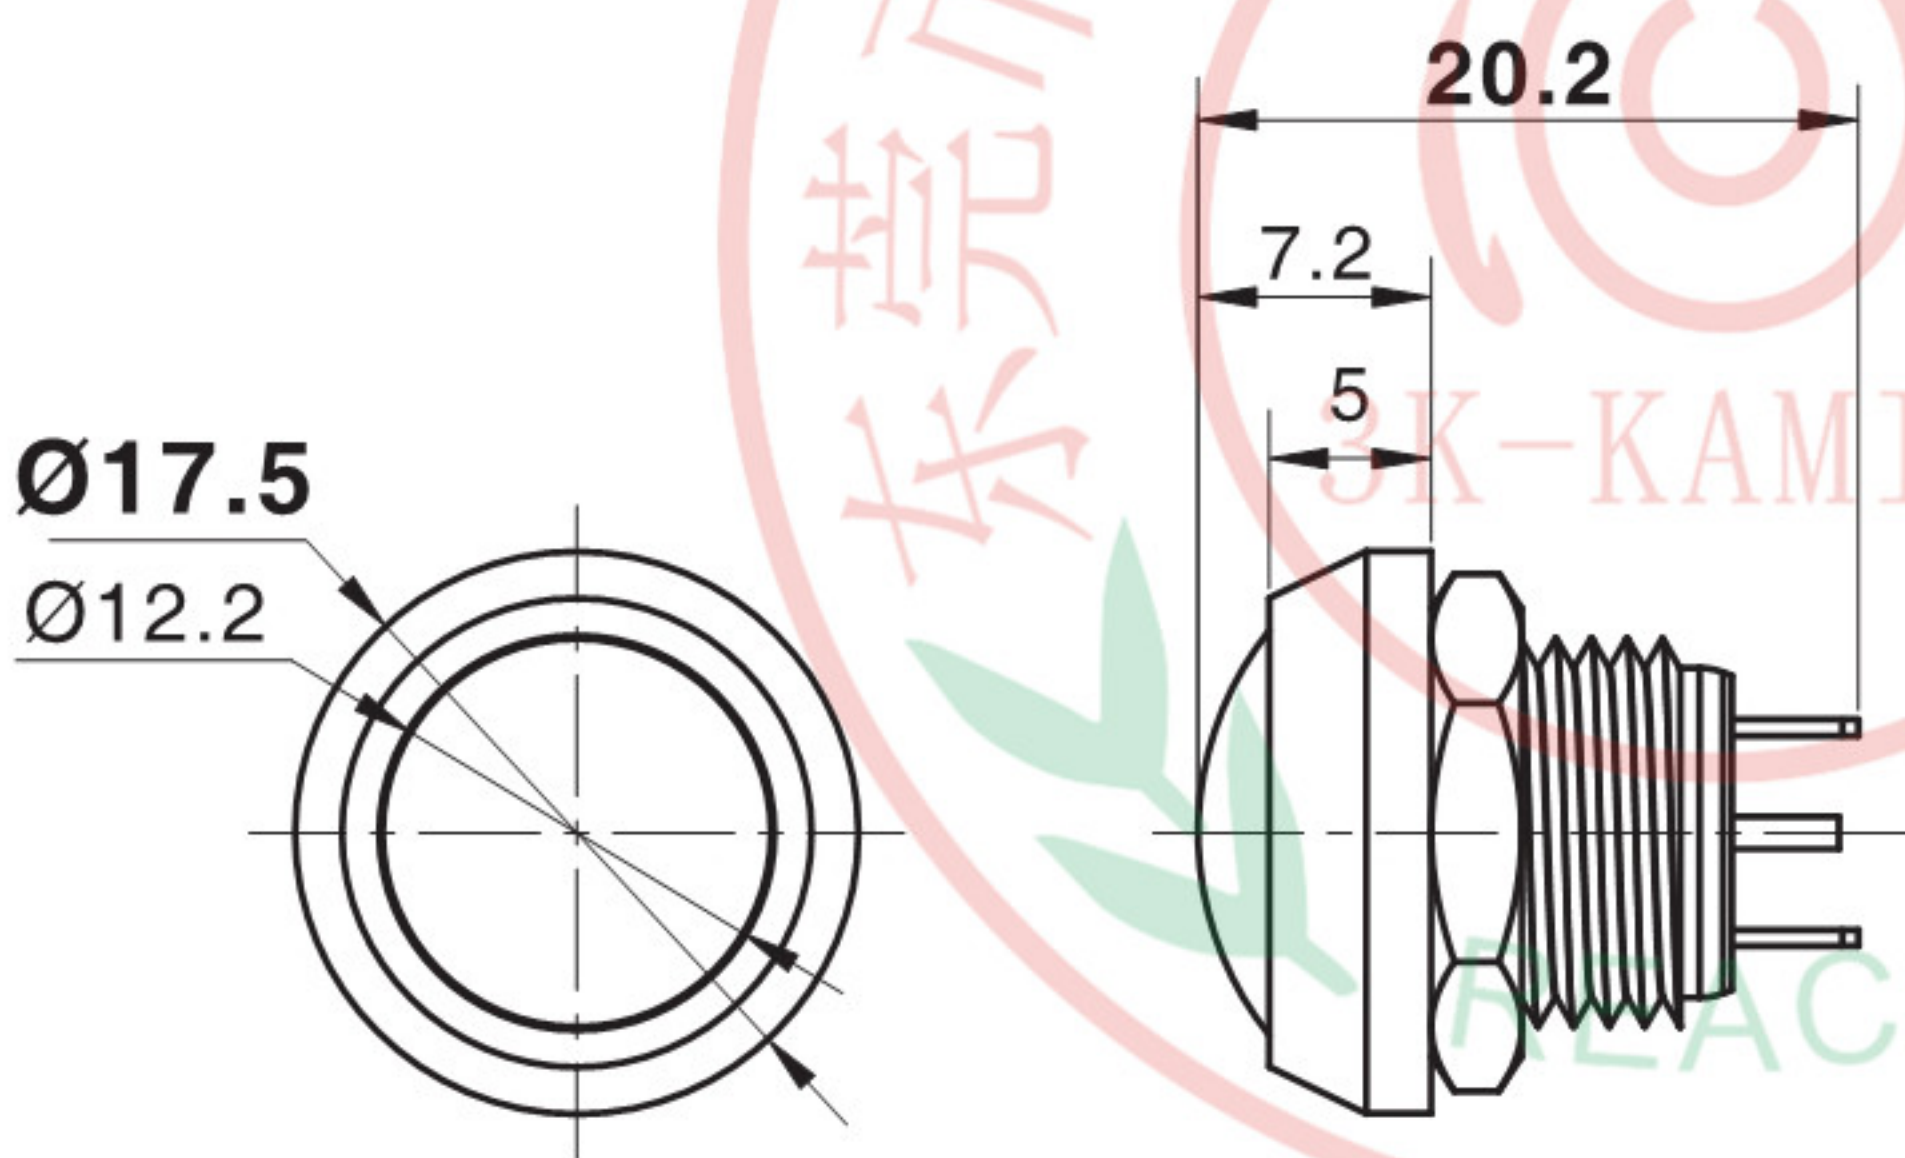

弧钮螺丝型(铝)

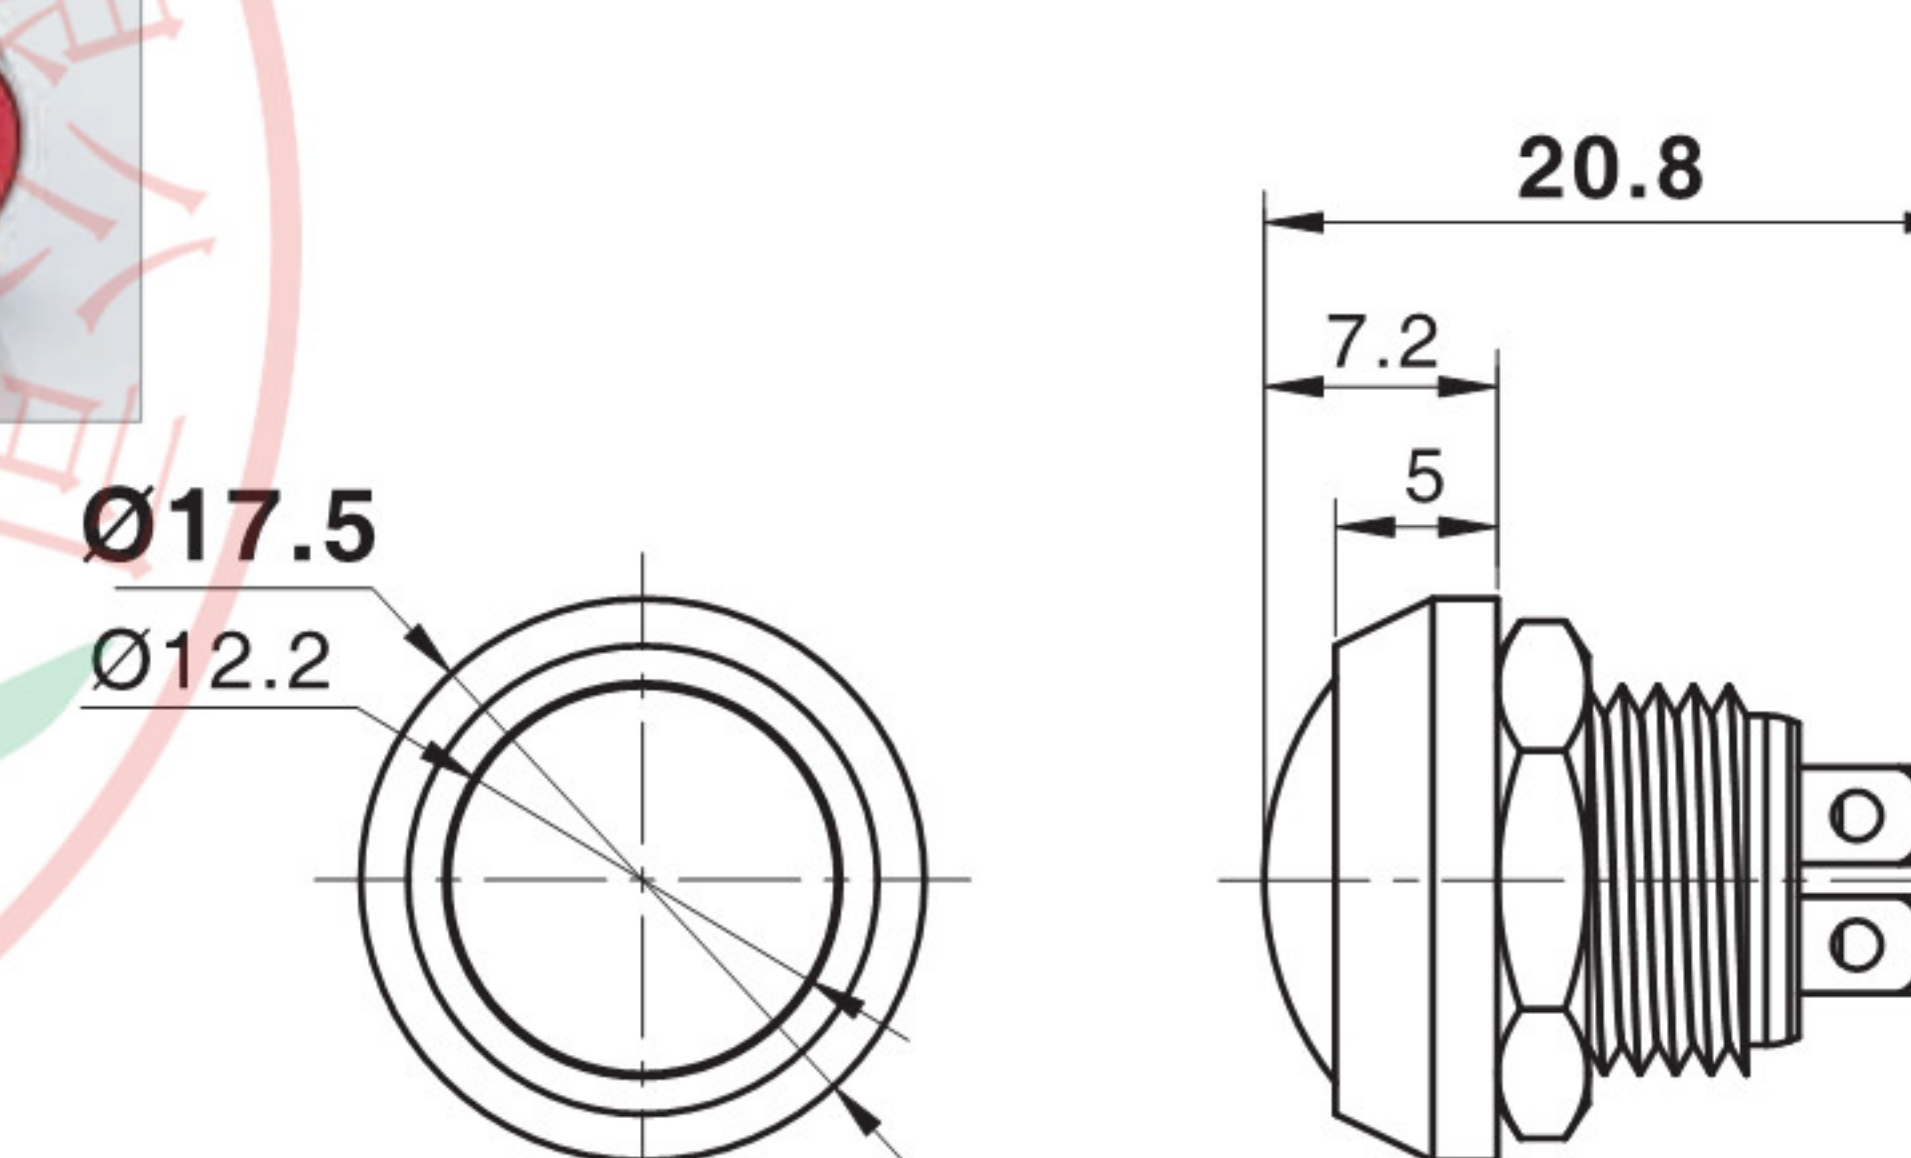

THIS DRAWNG CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
TEL:0769-82123233 FAX:0769-835364333 WWW.3K-KAMING.COM