



东莞市朗纶电子制品有限公司
Dongguan langlun electronic products Co., Ltd

主要技术参数 Technical Parameter

保护等级/Degree of Protection	IP67
触点类型/Contact Type	C:1NO+1NC/2NO+2NC
最大电压/Maximum Voltage	250V AC/DC
热流/Thermal Current	3A
最小负载/Minimum Applicable Load	5V AC/DC, 1mA
触点材料/Contact material	Silver plated glod
端子形式/Terminal Style	.110" Solder/ Quick Connect
运行温度/Operating Temperature	-25° to +55℃
操作湿度/Operating Humidity	45 to 85% RH
接触电阻/Contact Resistance	50MΩ maximum
绝缘电阻/Insulation Resistance	100MΩ minimum (500V DC megger)
震荡电阻/Vibration Resistance	10 to 55Hz, amplitude 1.2mm p-p
保护等级/Degree of Protection	>10g
电气寿命/Electrical Life	100,000 operations minimum (at full rated load)
机械寿命/Mechanical Life	Maintained: 1,000,000 operations minimum Momentary: 1,000,000 operations minimum
耐压/Dielectrical Life	Switch Unit: 2,000V AC, 1 min. between live/dead part and terminals of different poles; 1,000V AC, 1 minute between terminals of the same pole; 1,500V AC, 1 minute between contact and lamp terminals. Illumination Unit: 2,000V AC, 1 min. between live part/ground
锡焊温度/Soldering Temperature	20W/5 seconds or 260℃/3 seconds

Ø16金属防水按钮开关 Metal Waterproof Push Button Switch


名称/外观 Product appearance	带灯形式 Illuminated type	操作类别 Operation	触点 Contact	产品型号 Model	外壳材料 Crust Material
	不带灯 Without LED	自复 Momentary	1NO+1NC	J16-211	Nil:不锈钢 T:铜镀镍 G:铜镀铬 Nil:Stainless steel T: Copper Plated Ni G: Copper plated Cr
			2NO+2NC	J16-212	
		自锁 Maintained	1NO+1NC	J16-311	
			2NO+2NC	J16-312	
	不带灯 Without LED	自复 Momentary	1NO+1NC	J16-221	
			2NO+2NC	J16-222	
		自锁 Maintained	1NO+1NC	J16-321	
			2NO+2NC	J16-322	

平钮


高位钮



单刀/1Pole
双刀/2Pole

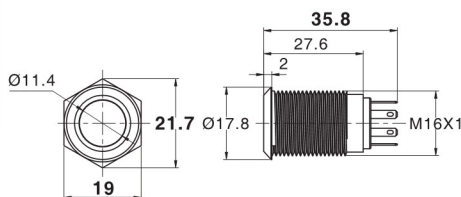

单刀/1Pole
双刀/2Pole

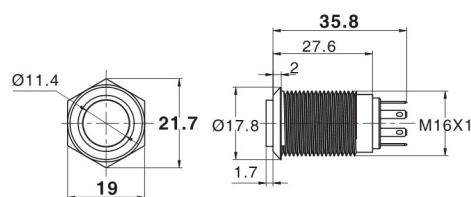

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
TEL:0769-82123233 FAX:0769-835364333 WWW.3K-KAMING.COM