

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD







Electrical

Current Rating: 2A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 500 MΩ MIN
Withstanding Voltage: 100V AC r.m.s
Temperature Range-Operating: -25°C~+85°C

Material and Plating

Housing: PA6T(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Gold Plated/Selective gold in contact area,
matte(bright) tin on tail

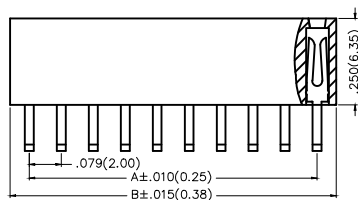

Recommended P.C.Board Layout

Ordering Information

FFH 200 07 - S XX B X XX 4 K6 K
1 2 3 4 5 6 7 8 9 10 11

1 Category FFH-Female Header	2 Series Number 200-Pitch2.0mm	3 Distinction No. 07	4 Row Option S-Single Row	5 Circuits XX	6 Entry Angle B-90° Angle
7 Plating 1-Gold Plated 3-Selective gold in contact area, matte(bright) tin on tail	8 Thickness of Plating 00-Gold Flash 05-5μ"	9 Material-Resin 4-PA6T	10 Color-Resin K6-Black	11 Packaging K-Tray	Custom plate available

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/AUG/13	PART NO. FFH20007-SXXBXXX4K6K	ITEM NO. FFH20007	 3K-KAMING
	DESIGN UNITS Inch (metric)	X.X±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 22/AUG/13	TITLE Board to Board (Female Header) Pitch 2.0mm 90° Angle (DIP)	
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX±1'	DRAWN BY JACOB	DATE 22/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	REV 0 SHEET NO. 1/1

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
2	FFH20007-S02BXXX4K6K	.079(2.00)	.177(4.50)	22	FFH20007-S22BXXX4K6K	1.654(42.00)	1.752(44.50)
3	FFH20007-S03BXXX4K6K	.157(4.00)	.256(6.50)	23	FFH20007-S23BXXX4K6K	1.732(44.00)	1.831(46.50)
4	FFH20007-S04BXXX4K6K	.236(6.00)	.335(8.50)	24	FFH20007-S24BXXX4K6K	1.811(46.00)	1.909(48.50)
5	FFH20007-S05BXXX4K6K	.315(8.00)	.413(10.50)	25	FFH20007-S25BXXX4K6K	1.890(48.00)	1.988(50.50)
6	FFH20007-S06BXXX4K6K	.394(10.00)	.492(12.50)	26	FFH20007-S26BXXX4K6K	1.969(50.00)	2.067(52.50)
7	FFH20007-S07BXXX4K6K	.472(12.00)	.571(14.50)	27	FFH20007-S27BXXX4K6K	2.047(52.00)	2.146(54.50)
8	FFH20007-S08BXXX4K6K	.551(14.00)	.650(16.50)	28	FFH20007-S28BXXX4K6K	2.126(54.00)	2.224(56.50)
9	FFH20007-S09BXXX4K6K	.630(16.00)	.728(18.50)	29	FFH20007-S29BXXX4K6K	2.205(56.00)	2.303(58.50)
10	FFH20007-S10BXXX4K6K	.709(18.00)	.807(20.50)	30	FFH20007-S30BXXX4K6K	2.283(58.00)	2.382(60.50)
11	FFH20007-S11BXXX4K6K	.787(20.00)	.886(22.50)	31	FFH20007-S31BXXX4K6K	2.362(60.00)	2.461(62.50)
12	FFH20007-S12BXXX4K6K	.866(22.00)	.965(24.50)	32	FFH20007-S32BXXX4K6K	2.441(62.00)	2.539(64.50)
13	FFH20007-S13BXXX4K6K	.845(24.00)	1.043(26.50)	33	FFH20007-S33BXXX4K6K	2.520(64.00)	2.618(66.50)
14	FFH20007-S14BXXX4K6K	1.024(26.00)	1.122(28.50)	34	FFH20007-S34BXXX4K6K	2.598(66.00)	2.697(68.50)
15	FFH20007-S15BXXX4K6K	1.102(28.00)	1.201(30.50)	35	FFH20007-S35BXXX4K6K	2.677(68.00)	2.776(70.50)
16	FFH20007-S16BXXX4K6K	1.181(30.00)	1.280(32.50)	36	FFH20007-S36BXXX4K6K	2.756(70.00)	2.854(72.50)
17	FFH20007-S17BXXX4K6K	1.260(32.00)	1.358(34.50)	37	FFH20007-S37BXXX4K6K	2.835(72.00)	2.933(74.50)
18	FFH20007-S18BXXX4K6K	1.339(34.00)	1.437(36.50)	38	FFH20007-S38BXXX4K6K	2.913(74.00)	3.012(76.50)
19	FFH20007-S19BXXX4K6K	1.417(36.00)	1.516(38.50)	39	FFH20007-S39BXXX4K6K	2.992(76.00)	3.091(78.50)
20	FFH20007-S20BXXX4K6K	1.496(38.00)	1.594(40.50)	40	FFH20007-S40BXXX4K6K	3.071(78.00)	3.169(80.50)
21	FFH20007-S21BXXX4K6K	1.575(40.00)	1.673(42.50)				






 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/AUG/13	PART NO. FFH20007-SXXBXXX4K6K	ITEM NO. FFH20007	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 22/AUG/13	TITLE Board to Board (Female Header) Pitch 2.0mm 90° Angle (DIP)	
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX±1'	DRAWN BY JACOB	DATE 22/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	REV 0 SHEET NO. 1/1

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Electrical
 Current Rating: 2A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 500 MΩ MIN
 Withstanding Voltage: 100V AC r.m.s
 Temperature Range—Operating: -25°C~+85°C

Material and Plating
 Housing: PA6T(UL 94V-0)
 Contact Pin: Phosphor Bronze
 Plating: Gold Plated/Selective gold in contact area, matte(bright) tin on tail

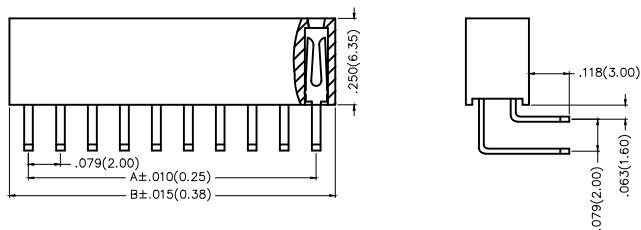

Recommended P.C.Board Layout



Ordering Information

FFH 200 07 — D XX B X XX 4 K6 K
 1 2 3 4 5 6 7 8 9 10 11

1 Category FFH—Female Header	2 Series Number 200—Pitch2.0mm	3 Distinction No. 07	4 Row Option D—Double Row	5 Circuits XX	6 Entry Angle B—90° Angle
7 Plating 1—Gold Plated 3—Selective gold in contact area, matte(bright) tin on tail	8 Thickness of Plating 00—Gold Flash 05—5μ*	9 Material—Resin 4—PA6T	10 Color—Resin K6—Black	11 Packaging K—Tray	

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/AUG/13	PART NO. FFH20007-DXXBXXX4K6K	ITEM NO. FFH2000	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.X±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 22/AUG/13	TITLE Board to Board (Female Header) Pitch 2.0mm 90° Angle (DIP)	
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°	DRAWN BY JACOB	DATE 22/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XXX±.004(0.10)	.XXX'±0.5°			REV 0	SHEET NO. 1/1

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
4	FFH20007-D04BXXX4K6K	.079(2.00)	.177(4.50)	44	FFH20007-D44BXXX4K6K	1.654(42.00)	1.752(44.50)
6	FFH20007-D06BXXX4K6K	.157(4.00)	.256(6.50)	46	FFH20007-D46BXXX4K6K	1.732(44.00)	1.831(46.50)
8	FFH20007-D08BXXX4K6K	.236(6.00)	.335(8.50)	48	FFH20007-D48BXXX4K6K	1.811(46.00)	1.909(48.50)
10	FFH20007-D10BXXX4K6K	.315(8.00)	.413(10.50)	50	FFH20007-D50BXXX4K6K	1.890(48.00)	1.988(50.50)
12	FFH20007-D12BXXX4K6K	.394(10.00)	.492(12.50)	52	FFH20007-D52BXXX4K6K	1.969(50.00)	2.067(52.50)
14	FFH20007-D14BXXX4K6K	.472(12.00)	.571(14.50)	54	FFH20007-D54BXXX4K6K	2.047(52.00)	2.146(54.50)
16	FFH20007-D16BXXX4K6K	.551(14.00)	.650(16.50)	56	FFH20007-D56BXXX4K6K	2.126(54.00)	2.224(56.50)
18	FFH20007-D18BXXX4K6K	.630(16.00)	.728(18.50)	58	FFH20007-D58BXXX4K6K	2.205(56.00)	2.303(58.50)
20	FFH20007-D20BXXX4K6K	.709(18.00)	.807(20.50)	60	FFH20007-D60BXXX4K6K	2.283(58.00)	2.382(60.50)
22	FFH20007-D22BXXX4K6K	.787(20.00)	.886(22.50)	62	FFH20007-D62BXXX4K6K	2.362(60.00)	2.461(62.50)
24	FFH20007-D24BXXX4K6K	.866(22.00)	.965(24.50)	64	FFH20007-D64BXXX4K6K	2.441(62.00)	2.539(64.50)
26	FFH20007-D26BXXX4K6K	.845(24.00)	1.043(26.50)	66	FFH20007-D66BXXX4K6K	2.520(64.00)	2.618(66.50)
28	FFH20007-D28BXXX4K6K	1.024(26.00)	1.122(28.50)	68	FFH20007-D68BXXX4K6K	2.598(66.00)	2.697(68.50)
30	FFH20007-D30BXXX4K6K	1.102(28.00)	1.201(30.50)	70	FFH20007-D70BXXX4K6K	2.677(68.00)	2.776(70.50)
32	FFH20007-D32BXXX4K6K	1.181(30.00)	1.280(32.50)	72	FFH20007-D72BXXX4K6K	2.756(70.00)	2.854(72.50)
34	FFH20007-D34BXXX4K6K	1.260(32.00)	1.358(34.50)	74	FFH20007-D74BXXX4K6K	2.835(72.00)	2.933(74.50)
36	FFH20007-D36BXXX4K6K	1.339(34.00)	1.437(36.50)	76	FFH20007-D76BXXX4K6K	2.913(74.00)	3.012(76.50)
38	FFH20007-D38BXXX4K6K	1.417(36.00)	1.516(38.50)	78	FFH20007-D78BXXX4K6K	2.992(76.00)	3.091(78.50)
40	FFH20007-D40BXXX4K6K	1.496(38.00)	1.594(40.50)	80	FFH20007-D80BXXX4K6K	3.071(78.00)	3.169(80.50)
42	FFH20007-D42BXXX4K6K	1.575(40.00)	1.673(42.50)				







 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/AUG/13	PART NO. FFH20007-DXXBXXX4K6K	ITEM NO. FFH20007	 3K-KAMING®
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 22/AUG/13	TITLE Board to Board (Female Header) Pitch 2.0mm 90° Angle (DIP)		
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X±2'	DRAWN BY JACOB	DATE 22/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)					
		X.XXX±.004(0.10)					

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Electrical
 Current Rating: 2A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 500 MΩ MIN
 Withstanding Voltage: 100V AC r.m.s
 Temperature Range—Operating: -25°C~+85°C
 Material and Plating
 Housing: PA6T(UL 94V-0)
 Contact Pin: Phosphor Bronze
 Plating: Gold Plated/Selective gold in contact area,
 matte(bright) tin on tail

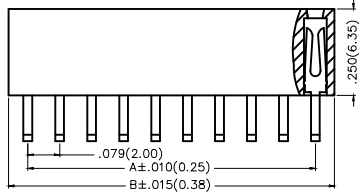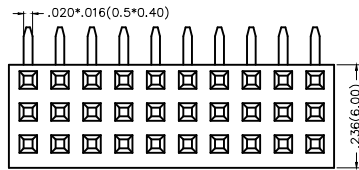

Recommended P.C.Board Layout



Ordering Information

FFH 200 07 — T XX B X XX 4 K6 K
 1 2 3 4 5 6 7 8 9 10 11

1 Category FFH—Female Header	2 Series Number 200—Pitch2.0mm	3 Distinction No. 07	4 Row Option T—Triple Row	5 Circuits XX	6 Entry Angle B—90° Angle
7 Plating 1—Gold Plated 3—Selective gold in contact area, matte(bright) tin on tail	8 Thickness of Plating 00—Gold Flash 05—5μ" Custom plate available	9 Material—Resin 4—PA6T	10 Color—Resin K6—Black	11 Packaging K—Tray	

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 21/AUG/13	PART NO. FFH20007-TXXBXX4K6K	ITEM NO. FFH20007	 3K-KAMING	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20)	X.±5° .X±2°	CHECKED BY CHERRY	DATE 21/AUG/13	TITLE Board to Board (Female Header) Pitch 2.0mm 90° Angle (DIP)		REV 0
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX±1° .XXX±0.5°	DRAWN BY JACOB	DATE 21/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
6	FFH20007-T06BXX4K6K	.079(2.00)	.177(4.50)	66	FFH20007-T66BXX4K6K	1.654(42.00)	1.752(44.50)
9	FFH20007-T09BXX4K6K	.157(4.00)	.256(6.50)	69	FFH20007-T69BXX4K6K	1.732(44.00)	1.831(46.50)
12	FFH20007-T12BXX4K6K	.236(6.00)	.335(8.50)	72	FFH20007-T72BXX4K6K	1.811(46.00)	1.909(48.50)
15	FFH20007-T15BXX4K6K	.315(8.00)	.413(10.50)	75	FFH20007-T75BXX4K6K	1.890(48.00)	1.988(50.50)
18	FFH20007-T18BXX4K6K	.394(10.00)	.492(12.50)	78	FFH20007-T78BXX4K6K	1.969(50.00)	2.067(52.50)
21	FFH20007-T21BXX4K6K	.472(12.00)	.571(14.50)	81	FFH20007-T81BXX4K6K	2.047(52.00)	2.146(54.50)
24	FFH20007-T24BXX4K6K	.551(14.00)	.650(16.50)	84	FFH20007-T84BXX4K6K	2.126(54.00)	2.224(56.50)
27	FFH20007-T27BXX4K6K	.630(16.00)	.728(18.50)	87	FFH20007-T87BXX4K6K	2.205(56.00)	2.303(58.50)
30	FFH20007-T30BXX4K6K	.709(18.00)	.807(20.50)	90	FFH20007-T90BXX4K6K	2.283(58.00)	2.382(60.50)
33	FFH20007-T33BXX4K6K	.787(20.00)	.886(22.50)	93	FFH20007-T93BXX4K6K	2.362(60.00)	2.461(62.50)
36	FFH20007-T36BXX4K6K	.866(22.00)	.965(24.50)	96	FFH20007-T96BXX4K6K	2.441(62.00)	2.539(64.50)
39	FFH20007-T39BXX4K6K	.845(24.00)	1.043(26.50)	99	FFH20007-T99BXX4K6K	2.520(64.00)	2.618(66.50)
42	FFH20007-T42BXX4K6K	1.024(26.00)	1.122(28.50)	102	FFH20007-T102BXX4K6K	2.598(66.00)	2.697(68.50)
45	FFH20007-T45BXX4K6K	1.102(28.00)	1.201(30.50)	105	FFH20007-T105BXX4K6K	2.677(68.00)	2.776(70.50)
48	FFH20007-T48BXX4K6K	1.181(30.00)	1.280(32.50)	108	FFH20007-T108BXX4K6K	2.756(70.00)	2.854(72.50)
51	FFH20007-T51BXX4K6K	1.260(32.00)	1.358(34.50)	111	FFH20007-T111BXX4K6K	2.835(72.00)	2.933(74.50)
54	FFH20007-T54BXX4K6K	1.339(34.00)	1.437(36.50)	114	FFH20007-T114BXX4K6K	2.913(74.00)	3.012(76.50)
57	FFH20007-T57BXX4K6K	1.417(36.00)	1.516(38.50)	117	FFH20007-T117BXX4K6K	2.992(76.00)	3.091(78.50)
60	FFH20007-T60BXX4K6K	1.496(38.00)	1.594(40.50)	120	FFH20007-T120BXX4K6K	3.071(78.00)	3.169(80.50)
63	FFH20007-T63BXX4K6K	1.575(40.00)	1.673(42.50)				






 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 21/AUG/13	PART NO. FFH20007-TXXBXX4K6K	ITEM NO. FFH20007	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 21/AUG/13	TITLE Board to Board (Female Header) Pitch 2.0mm 90° Angle (DIP)	
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX±1'	DRAWN BY JACOB	DATE 21/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	REV 0 SHEET NO. 1/1

REV	LOCATIONS	DESCRIPTION	DATE



Electrical
 Current Rating: 2A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 500 MΩ MIN
 Withstanding Voltage: 100V AC r.m.s
 Temperature Range—Operating: -25°C~+85°C


Material and Plating
 Housing: PA6T(UL 94V-0)
 Contact Pin: Phosphor Bronze
 Plating: Gold Plated/Selective gold in contact area,
 matte(bright) tin on tail

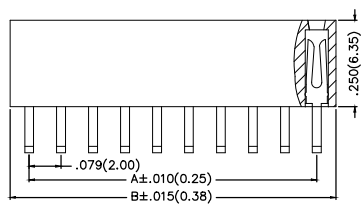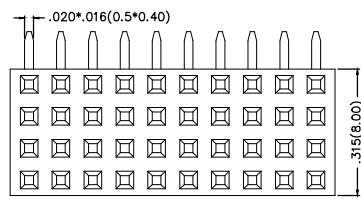

Ordering Information

FFH 200 07 - F XX B X XX 4 K6 K
 1 2 3 4 5 6 7 8 9 10 11

1 Category FFH—Female Header	2 Series Number 200—Pitch2.0mm	3 Distinction No. 07	4 Row Option F—Four row	5 Circuits XX	6 Entry Angle B—90° Angle
7 Plating 1—Gold Plated 3—Selective gold in contact area, matte(bright) tin on tail	8 Thickness of Plating 00—Gold Flash 05—5μ Custom plate available	9 Material—Resin 4—PA6T	10 Color—Resin K6—Black	11 Packaging K—Tray	



Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/AUG/13	PART NO. FFH20007-FXXBXXX4K6K	ITEM NO. FFH20007	 3K-KAMING REV 0 SHEET NO. 1/1
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 22/AUG/13	TITLE Board to Board (Female Header) Pitch 2.0mm 90° Angle (DIP)		
	X.XX±.008(0.20)	.X'±2'	DRAWN BY JACOB	DATE 22/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

REV	LOCATIONS	DESCRIPTION	DATE



Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
8	FFH20007-F08BXXX4K6K	.079(2.00)	.177(4.50)	88	FFH20007-F88BXXX4K6K	1.654(42.00)	1.752(44.50)
12	FFH20007-F12BXXX4K6K	.157(4.00)	.256(6.50)	92	FFH20007-F92BXXX4K6K	1.732(44.00)	1.831(46.50)
16	FFH20007-F16BXXX4K6K	.236(6.00)	.335(8.50)	96	FFH20007-F96BXXX4K6K	1.811(46.00)	1.909(48.50)
20	FFH20007-F20BXXX4K6K	.315(8.00)	.413(10.50)	100	FFH20007-F100BXXX4K6K	1.890(48.00)	1.988(50.50)
24	FFH20007-F24BXXX4K6K	.394(10.00)	.492(12.50)	104	FFH20007-F104BXXX4K6K	1.969(50.00)	2.067(52.50)
28	FFH20007-F28BXXX4K6K	.472(12.00)	.571(14.50)	108	FFH20007-F108BXXX4K6K	2.047(52.00)	2.146(54.50)
32	FFH20007-F32BXXX4K6K	.551(14.00)	.650(16.50)	112	FFH20007-F112BXXX4K6K	2.126(54.00)	2.224(56.50)
36	FFH20007-F36BXXX4K6K	.630(16.00)	.728(18.50)	116	FFH20007-F116BXXX4K6K	2.205(56.00)	2.303(58.50)
40	FFH20007-F40BXXX4K6K	.709(18.00)	.807(20.50)	120	FFH20007-F120BXXX4K6K	2.283(58.00)	2.382(60.50)
44	FFH20007-F44BXXX4K6K	.787(20.00)	.886(22.50)	124	FFH20007-F124BXXX4K6K	2.362(60.00)	2.461(62.50)
48	FFH20007-F48BXXX4K6K	.866(22.00)	.965(24.50)	128	FFH20007-F128BXXX4K6K	2.441(62.00)	2.539(64.50)
52	FFH20007-F52BXXX4K6K	.845(24.00)	1.043(26.50)	132	FFH20007-F132BXXX4K6K	2.520(64.00)	2.618(66.50)
56	FFH20007-F56BXXX4K6K	1.024(26.00)	1.122(28.50)	136	FFH20007-F136BXXX4K6K	2.598(66.00)	2.697(68.50)
60	FFH20007-F60BXXX4K6K	1.102(28.00)	1.201(30.50)	140	FFH20007-F140BXXX4K6K	2.677(68.00)	2.776(70.50)
64	FFH20007-F64BXXX4K6K	1.181(30.00)	1.280(32.50)	144	FFH20007-F144BXXX4K6K	2.756(70.00)	2.854(72.50)
68	FFH20007-F68BXXX4K6K	1.260(32.00)	1.358(34.50)	148	FFH20007-F148BXXX4K6K	2.835(72.00)	2.933(74.50)
72	FFH20007-F72BXXX4K6K	1.339(34.00)	1.437(36.50)	152	FFH20007-F152BXXX4K6K	2.913(74.00)	3.012(76.50)
76	FFH20007-F76BXXX4K6K	1.417(36.00)	1.516(38.50)	156	FFH20007-F156BXXX4K6K	2.992(76.00)	3.091(78.50)
80	FFH20007-F80BXXX4K6K	1.496(38.00)	1.594(40.50)	160	FFH20007-F160BXXX4K6K	3.071(78.00)	3.169(80.50)
84	FFH20007-F84BXXX4K6K	1.575(40.00)	1.673(42.50)				



 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/AUG/13	PART NO. FFH20007-FXXBXXX4K6K	ITEM NO. FFH20007	 3K-KAMING®
	X.±0.12(0.30)	X.±5'	CHECKED BY CHERRY	DATE 22/AUG/13	TITLE Board to Board (Female Header) Pitch 2.0mm 90° Angle (DIP)		
DESIGN UNITS Inch (metric)	X.X±0.008(0.20)	.X'±2'	DRAWN BY JACOB	DATE 22/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)					
		X.XXX±.004(0.10)					