



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Dimensions(in/mm)	
H	E
.039(1.00)	.059(1.50)~.069(1.75)
.059(1.50)	.079(2.00)~.089(2.25)
.079(2.00)	.098(2.50)~.108(2.75)
.098(2.50)	≥.118(3.00)

SPECIFICATIONS

Electrical

Current Rating: 3.0A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 1000 MΩ Min
 Withstanding Voltage: 600V AC r.m.s
 Temperature Range-Operating: -40°C~+105°C

Material

Housing: Glass Filled Polyester (UL 94V-0), Color: Black
 Pin: Brass
 Pin Plating: Gold plated/ Selective gold plated on contact area and 120μ" Min. matte tin plated on tails area

A

A

B

B

C

C

D




D

E

E

F

F

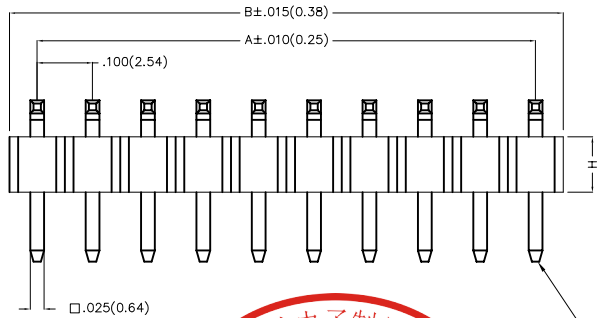

Circuit No.1


See Table1



Ordering Information

FPH 254 65 — S XX B X XX X XX XX XX B
 1 2 3 4 5 6 7 8 9 10 11 12 13

1 Category FPH-Pin Header	2 Series Number 254-Pitch2.54mm	3 Distinction No. 65	4 Row Option S-Single Row	5 Circuits XX	6 Entry Angle B-90° Angle	7 Plating 1-Gold plated 7-Selective gold plated on contact area and matte tin plated on tails area
8 Thickness of Plating 01-1μ" 15-15μ" Custom plate available	9 Material-Resin 1-PBT 4-PA6T	10 E Size 01,02...-Serial number (See Table1)	11 F Size 01,02...-Serial number (See Table1)	12 G Size 01,02...-Serial number (See Table1)	13 Packaging B-PE Bag	

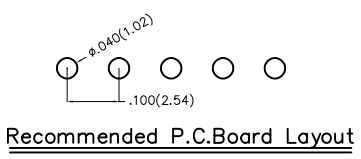

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A/L	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 24/DEC/19	PART NO. FPH25465-SXXBXXXXXXXXXXB	ITEM NO. FPH25465	 3K-KAMING REV 0 SHEET NO. 1/3
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 24/DEC/19	TITLE Board to Board(Pin Header) Pitch 2.54mm 90° Angle(DIP)		
	X.XX±.008(0.20)	.X'±2'	DRAWN BY ZOEY	DATE 24/DEC/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Table1

Serial number	Dimensions (in/mm) E	Serial number	Dimensions (in/mm) E
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) F	Serial number	Dimensions (in/mm) F
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		

Serial number	Dimensions (in/mm) G	Serial number	Dimensions (in/mm) G
01	.059(1.50)	19	.236(6.00)
02	.069(1.75)	20	.246(6.25)
03	.079(2.00)	21	.256(6.50)
04	.089(2.25)	22	.266(6.75)
05	.098(2.50)	23	.276(7.00)
06	.108(2.75)	24	.285(7.25)
07	.118(3.00)	25	.295(7.50)
08	.128(3.25)	26	.305(7.75)
09	.138(3.50)	27	.315(8.00)
10	.148(3.75)	28	.325(8.25)
11	.157(4.00)	29	.335(8.50)
12	.167(4.25)	30	.344(8.75)
13	.177(4.50)	31	.354(9.00)
14	.187(4.75)	32	.364(9.25)
15	.197(5.00)	33	.374(9.50)
16	.207(5.25)	34	.384(9.75)
17	.217(5.50)	35	.394(10.00)
18	.226(5.75)		



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 3K-KAMING
	X.±0.12(0.30)	X'.±5'	FRANK	24/DEC/19	FPH25465-SXXBXXXXXXXXXXB	FPH25465	
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		REV 0 SHEET NO. 2/3
SCALE 5:1 SIZE A4	X.XX±.006(0.15)	.XX'±1'	CHERRY	24/DEC/19	Board to Board(Pin Header) Pitch 2.54mm 90° Angle(DIP)		
	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			ZOEY	24/DEC/19			

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
1	FPH25465-S01BXXXXXXXXXB	—	.100(2.54)	21	FPH25465-S21BXXXXXXXXXB	2.000(50.80)	2.100(53.34)
2	FPH25465-S02BXXXXXXXXXB	.100(2.54)	.200(5.08)	22	FPH25465-S22BXXXXXXXXXB	2.100(53.34)	2.200(55.88)
3	FPH25465-S03BXXXXXXXXXB	.200(5.08)	.300(7.62)	23	FPH25465-S23BXXXXXXXXXB	2.200(55.88)	2.300(58.42)
4	FPH25465-S04BXXXXXXXXXB	.300(7.62)	.400(10.16)	24	FPH25465-S24BXXXXXXXXXB	2.300(58.42)	2.400(60.96)
5	FPH25465-S05BXXXXXXXXXB	.400(10.16)	.500(12.70)	25	FPH25465-S25BXXXXXXXXXB	2.400(60.96)	2.500(63.50)
6	FPH25465-S06BXXXXXXXXXB	.500(12.70)	.600(15.24)	26	FPH25465-S26BXXXXXXXXXB	2.500(63.50)	2.600(66.04)
7	FPH25465-S07BXXXXXXXXXB	.600(15.24)	.700(17.78)	27	FPH25465-S27BXXXXXXXXXB	2.600(66.04)	2.700(68.58)
8	FPH25465-S08BXXXXXXXXXB	.700(17.78)	.800(20.32)	28	FPH25465-S28BXXXXXXXXXB	2.700(68.58)	2.800(71.12)
9	FPH25465-S09BXXXXXXXXXB	.800(20.32)	.900(22.86)	29	FPH25465-S29BXXXXXXXXXB	2.800(71.12)	2.900(73.66)
10	FPH25465-S10BXXXXXXXXXB	.900(22.86)	1.000(25.40)	30	FPH25465-S30BXXXXXXXXXB	2.900(73.66)	3.000(76.20)
11	FPH25465-S11BXXXXXXXXXB	1.000(25.40)	1.100(27.94)	31	FPH25465-S31BXXXXXXXXXB	3.000(76.20)	3.100(78.74)
12	FPH25465-S12BXXXXXXXXXB	1.100(27.94)	1.200(30.48)	32	FPH25465-S32BXXXXXXXXXB	3.100(78.74)	3.200(81.28)
13	FPH25465-S13BXXXXXXXXXB	1.200(30.48)	1.300(33.02)	33	FPH25465-S33BXXXXXXXXXB	3.200(81.28)	3.300(83.82)
14	FPH25465-S14BXXXXXXXXXB	1.300(33.02)	1.400(35.56)	34	FPH25465-S34BXXXXXXXXXB	3.300(83.82)	3.400(86.36)
15	FPH25465-S15BXXXXXXXXXB	1.400(35.56)	1.500(38.10)	35	FPH25465-S35BXXXXXXXXXB	3.400(86.36)	3.500(88.90)
16	FPH25465-S16BXXXXXXXXXB	1.500(38.10)	1.600(40.64)	36	FPH25465-S36BXXXXXXXXXB	3.500(88.90)	3.600(91.44)
17	FPH25465-S17BXXXXXXXXXB	1.600(40.64)	1.700(43.18)	37	FPH25465-S37BXXXXXXXXXB	3.600(91.44)	3.700(93.98)
18	FPH25465-S18BXXXXXXXXXB	1.700(43.18)	1.800(45.72)	38	FPH25465-S38BXXXXXXXXXB	3.700(93.98)	3.800(96.52)
19	FPH25465-S19BXXXXXXXXXB	1.800(45.72)	1.900(48.26)	39	FPH25465-S39BXXXXXXXXXB	3.800(96.52)	3.900(99.06)
20	FPH25465-S20BXXXXXXXXXB	1.900(48.26)	2.000(50.80)	40	FPH25465-S40BXXXXXXXXXB	3.900(99.06)	4.000(101.60)



<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>3K-KAMI NG</p>
	X.±.012(0.30)	X.±5'	FRANK	24/DEC/19	FPH25465-SXXBXXXXXXXXXB	FPH25465	
	DESIGN UNITS Inch (metric)		X.X±.008(0.20)	CHECKED BY	DATE	TITLE	
SCALE	SIZE	X.XX±.006(0.15)	CHEERY	24/DEC/19	Board to Board(Pin Header) Pitch 2.54mm 90° Angle(DIP)		REV 0
5:1	A/L	X.XXX±.004(0.10)	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMI NG) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 3/3
		X.XX±1'	ZOEY	24/DEC/19			

1 2 3 4 5 6 7 8