




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C
Material and Plating
Housing: PBT(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Selective gold in contact area, tin on tail

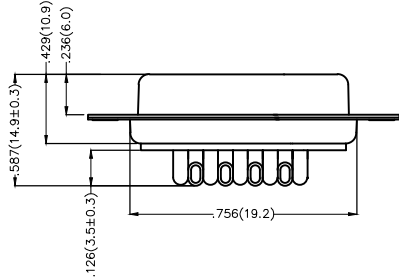

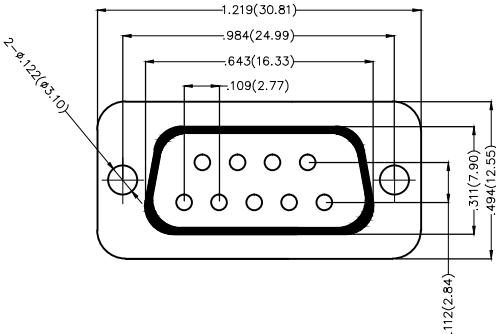

Ordering Information

FDB 09 06 — F0 W S X XX XX X A
1 2 3 4 5 6 7 8 9 10 11




1	Category FDB—D—SUB Connectors	2	Circuits 09—9Circuits	3	Distinction No. 06	4	Type F0—Female	5	Assembly Layout W—Welding Type	6	Entry Angle S—180° Vertical
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom plate available	9	Color—Resin K6—Black U1—Blue	10	Packaging L—Tube K—Tray	11	Distinction Type A—A Type		



 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB0906—F0WSXXXXXXA	ITEM NO. FDB0906	 3K—KAMING®			
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X'±5" .X'±2" .XX'±1" .XXX'±0.5'	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D—SUB Connectors 9 Circuits 180° Vertical Female			REV 0	SHEET NO. 1/1
	SCALE 5:1	SIZE A4		DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

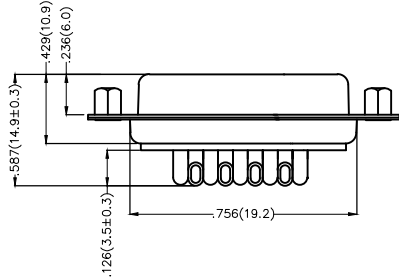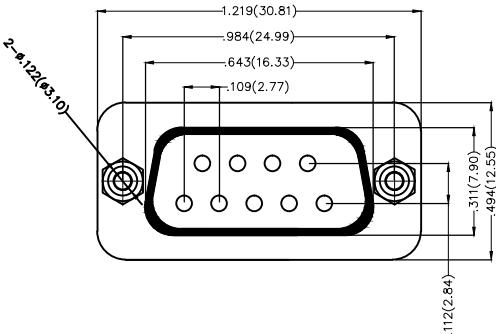

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C
Material and Plating
Housing: PBT(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Selective gold in contact area, tin on tail



Ordering Information




FDB 09 06 — F0 W S X XX XX X B
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB—D—SUB Connectors	2	Circuits 09—9Circuits	3	Distinction No. 06	4	Type F0—Female	5	Assembly Layout W—Welding Type	6	Entry Angle S—180° Vertical
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom plate available	9	Color—Resin K6—Black U1—Blue	10	Packaging L—Tube K—Tray	11	Distinction Type B—B Type		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB0906—F0WSXXXXXB	ITEM NO. FDB0906	 3K-KAMING®	
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5"	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D—SUB Connectors 9 Circuits 180° Vertical Female		REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1"	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	.XXX'±0.5'						

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

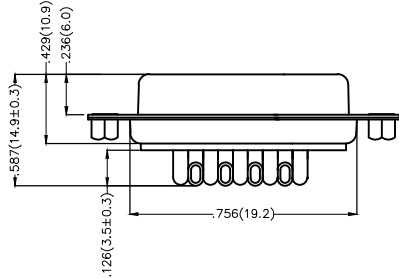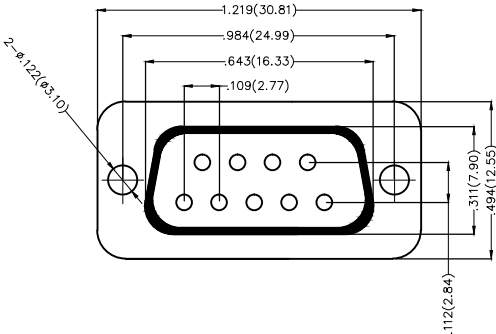

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C
Material and Plating
Housing: PBT(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Selective gold in contact area, tin on tail



Ordering Information

FDB 09 06 — F0 W S X XX XX X C
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB—D—SUB Connectors	2	Circuits 09—9Circuits	3	Distinction No. 06	4	Type F0—Female	5	Assembly Layout W—Welding Type	6	Entry Angle S—180° Vertical
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom plate available	9	Color—Resin K6—Black U1—Blue	10	Packaging L—Tube K—Tray	11	Distinction Type C—C Type		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB0906—F0WSXXXXXC	ITEM NO. FDB0906	 3K-KAMING®	
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5"	CHECKED BY	DATE	TITLE D—SUB Connectors 9 Circuits 180° Vertical Female		REV 0	SHEET NO. 1/1
		X.X±.008(0.20)	.X±2"	JACOB	28/JUN/13				
		X.XX±.006(0.15)	.XX±1"	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	.XXX±0.5"	CHERRY	28/JUN/13				
SCALE 5:1	SIZE A4								




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55℃~+105℃

Material and Plating

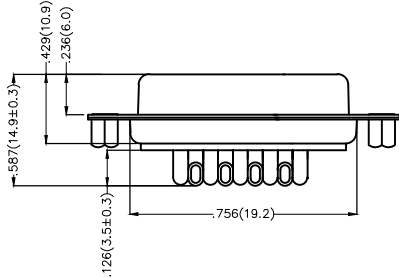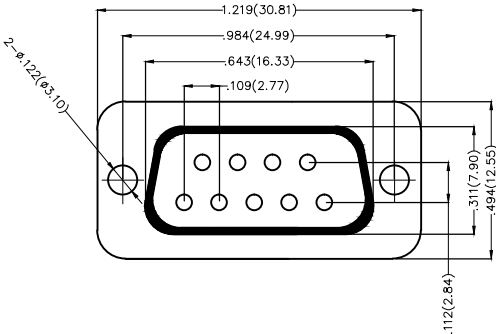

Housing: PBT(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Selective gold in contact area, tin on tail



Ordering Information




FDB 09 06 — F0 W S X XX XX X D
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB—D—SUB Connectors	2	Circuits 09—9Circuits	3	Distinction No. 06	4	Type F0—Female	5	Assembly Layout W—Welding Type	6	Entry Angle S—180° Vertical
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom plate available	9	Color—Resin K6—Black U1—Blue	10	Packaging L—Tube K—Tray	11	Distinction Type D—D Type		

<div></div> <div>THIRD ANGLE PROJECTION</div>		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK		DATE 28/JUN/13		PART NO. FDB0906—F0WSXXXXXD		ITEM NO. FDB0906		<div></div> <div>3K-KAMING</div>	
				CHECKED BY JACOB		DATE 28/JUN/13		TITLE D—SUB Connectors 9 Circuits 180° Vertical Female					
				DRAWN BY CHERRY		DATE 28/JUN/13							
DESIGN UNITS Inch (metric)		X.±0.12(0.30)	X.±5°	JACOB		28/JUN/13		REV 0				SHEET NO. 1/1	
SCALE 5:1		X.XX±.008(0.20)	X.±2°										
SIZE A4		X.XX±.006(0.15)	X.X°±1°	CHERRY		28/JUN/13		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
		X.XXX±0.04(0.10)	.XX°±0.5°										
4		5		6		7		8					

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

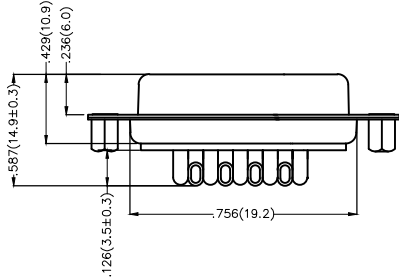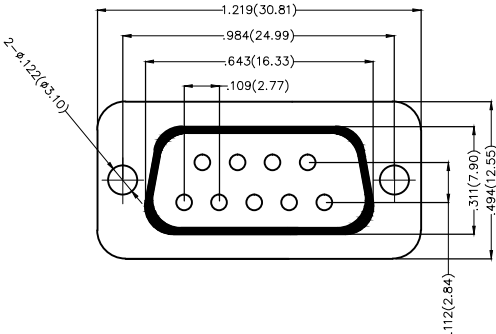

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C
Material and Plating
Housing: PBT(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Selective gold in contact area, tin on tail



Ordering Information

FDB 09 06 — F0 W S X XX XX X E
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB—D—SUB Connectors	2	Circuits 09—9Circuits	3	Distinction No. 06	4	Type F0—Female	5	Assembly Layout W—Welding Type	6	Entry Angle S—180° Vertical
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom plate available	9	Color—Resin K6—Black U1—Blue	10	Packaging L—Tube K—Tray	11	Distinction Type E—E Type		

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB0906—F0WSXXXXXE	ITEM NO. FDB0906	 3K-KAMING®		
	X.±.012(0.30)	X.±5'	CHECKED BY	DATE	TITLE D—SUB Connectors 9 Circuits 180° Vertical Female				
	X.X±.008(0.20)	.X±2'	JACOB	28/JUN/13					
	X.XX±.006(0.15)	.XX±1'	DRAWN BY	DATE					REV 0
X.XXX±.004(0.10)	.XXX±0.5'	CHERRY	28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
DESIGN UNITS Inch (metric)									
SCALE 5:1	SIZE A4								