
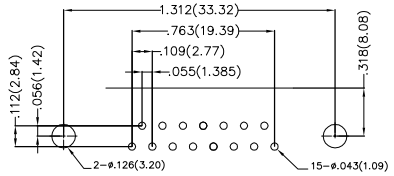

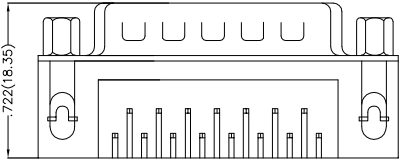
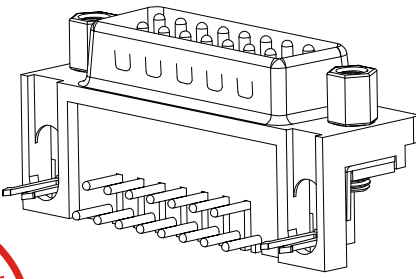
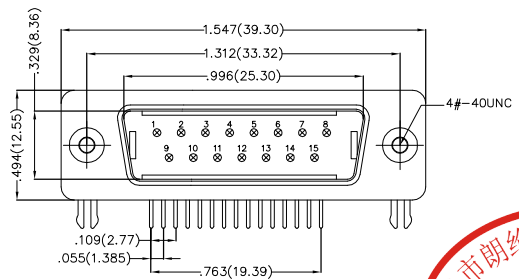


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
 Current Rating: 3A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 25 MΩ Max
 Insulation Resistance: 1000 MΩ MIN
 Withstanding Voltage: 500V AC r.m.s
 Operating Temperature: -55°C~+105°C
 Material
 Housing: PBT 30%G.F UL 94V-0
 Contact: Phosphor Bronze Gold/Tin-Plated

Products Categories: A.B.C.D

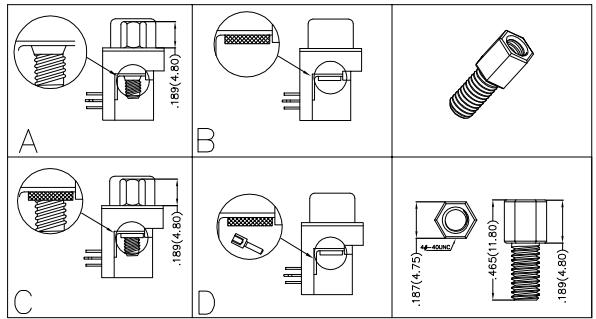

PCB LAYOUT



Ordering Informaion

FDB 15 03 — MO D B * ** ** K *

1 2 3 4 5 6 7 8 9 10 11

1 Series Name	2 No. of pins	3 Distinction No.	4 Type	5 Assembly Layout	6 Entry Type
-FDB	-15	-03	Male-M0	DIP-D	Bend-B
7 Gold Plating	8 Thickness of Plating	9 Plastic Colour	10 Packaging	11 Products Categories	
Gold Plated All-1 Tin Plated All-2 Half Gold/Tin -3	Gold Plating-00 3u"-03..... Custom Plate Available	Black-K6 Blue-U1	PE Tray-K	A Type-A B Type-B C Type-C D Type-D	

Third Angle Projection	TOLERANCE (Expect as noted)		APPROVE	Frank	PART NO:		TITLE:	ITEM NO:	
	UNIT: in(mm)	X.±.012(0.30) X.X±.008(0.20)	CHECK	FAN	FDB1503-M0DB*****K*		D-SUB	DB1503	
SCALE: 1:1	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX±1" .XXX±0.5"	DRAWN	Cherry	DATE	13/JUN/11	REQUIRED DOCUMENTS: D-SUB 15Pin Male Series		REV: 0