



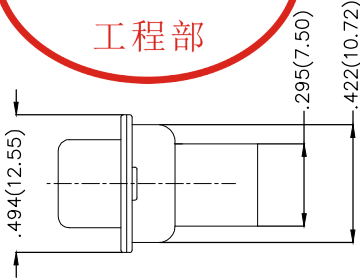



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Products Categories: A,B,C

Part No.: FDBXX08-FOTS000XXKA  A Type	Part No.: FDBXX08-FOTS000XXKB  BACK NUT H=0.157in(4.0mm) B Type	Part No.: FDBXX08-FOTS000XXKC  FORMER NUT H=0.157in(4.0mm) C Type
---	---	---

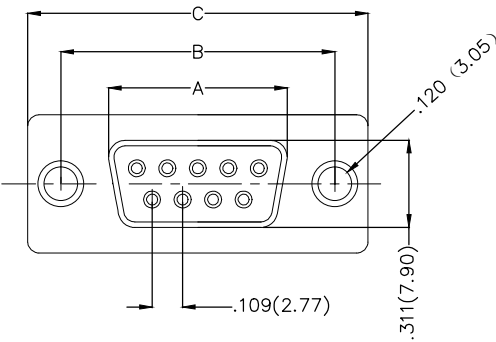

Circuits (n)	Part No.	Dimensions(in/mm)				
		A	B	C	D	E
09	FDB0908-FOTS000XXKX	0.643(16.33)	.984(24.99)	1.216(30.80)	0.750(19.28)	0.610(15.50)
15	FDB1508-FOTS000XXKX	0.971(24.66)	1.311(33.30)	1.541(39.15)	1.085(27.55)	0.974(24.75)
25	FDB2508-FOTS000XXKX	1.511(38.38)	1.852(47.04)	2.089(53.04)	1.624(41.25)	1.496(38.00)
37	FDB3708-FOTS000XXKX	2.157(54.80)	2.502(63.55)	2.729(69.32)	2.260(57.40)	2.134(54.20)

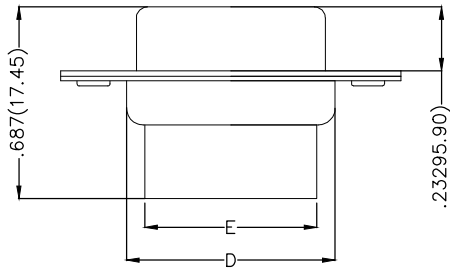

Ordering Information

FDB XX 08 - FO T S 0 00 XX K X  
1 2 3 4 5 6 7 8 9 10 11



1 Category FDB- D-SUB	2 Circuits 9,15,25,37	3 Distinction No. 08	4 Type FO-Female	5 Assembly Layout T-Terminal Type	6 Entry Angle S-180° Vertical
7 Plating 0	8 Thickness of Plating 00	9 Color-Resin K6-Black U1-Blue	10 Packaging K-Tray	11 Products Categories A-A Type B-B Type C-C Type	

SPECIFICATIONS

Housing: PBT UL 94V-0  
Shell: SPCC/Nickel Plated .  
Temperature Range-Operating: -25°C~+105°C

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDBXX08-FOTS000XXKX	ITEM NO. FDBXX08-FO	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X'±5'	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB FEMALE TERMINAL TYPE CONN		
SCALE 5:1	SIZE A4	X.XX±.006(0.15) .XX'±1'	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		