

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated

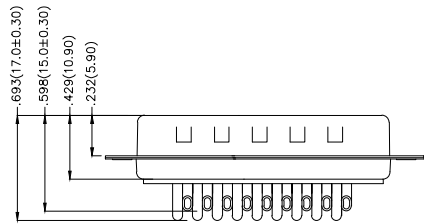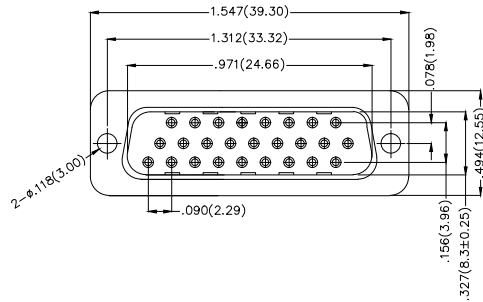

Ordering Information

FDB 26 04 - M0 W S 3 XX XX X A  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 04	4   Type M0-Male	5   Assembly Layout W-Welding Type	6   Entry Angle S-180° Vertical
7   Plating 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type A-A Type	



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-M0WS3XXXXXA	ITEM NO. FDB2604	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.X±.012(0.30) X.X±.008(0.20)	X.±5° .X±2°	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male	
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX±1° .XXX±0.5°	DRAWN BY CHERRY	DATE 28/JUN/13	REV 0	SHEET NO. 1/1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated

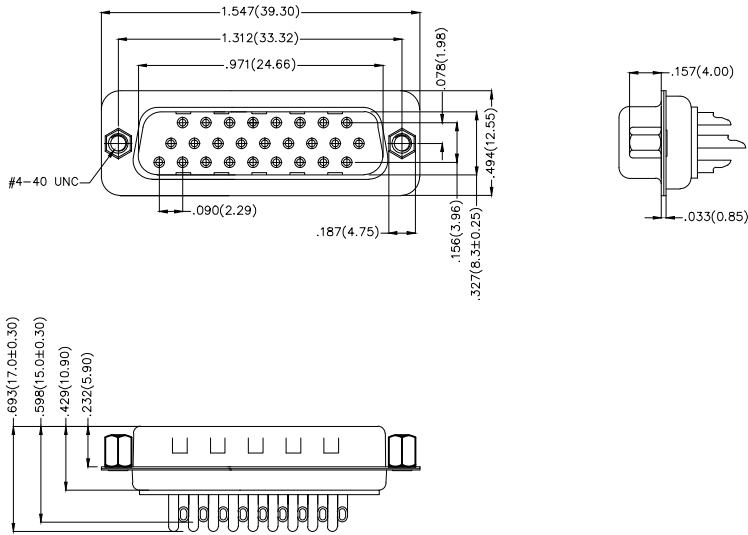

Ordering Information

FDB 26 04 - M0 W S 3 XX XX X B  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 04	4   Type M0-Male	5   Assembly Layout W-Welding Type	6   Entry Angle S-180° Vertical
7   Plating 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type B-B Type	



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-M0WS3XXXXXB	ITEM NO. FDB2604	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.X±0.012(0.30) X.X±0.008(0.20)	X.±5° .X±2°	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male	
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX±1° .XXX±0.5°	DRAWN BY CHERRY	DATE 28/JUN/13	REV 0	SHEET NO. 1/1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated

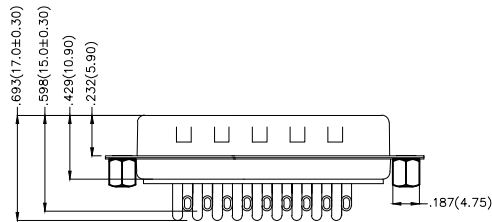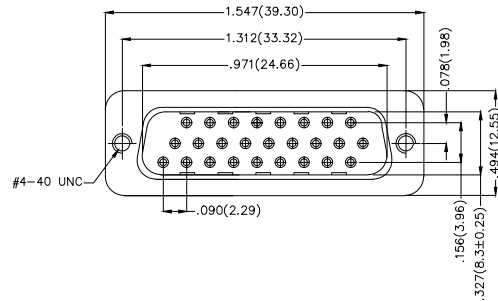

Ordering Information

FDB 26 04 - M0 W S 3 XX XX X C  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 04	4   Type M0-Male	5   Assembly Layout W-Welding Type	6   Entry Angle S-180° Vertical
7   Plating 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type C-C Type	



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-M0WS3XXXXXC	ITEM NO. FDB2604	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.X±.012(0.30) X.X±.008(0.20)	X.±5° .X±2°	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male	
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX±1° .XXX±0.5°	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	REV 0 SHEET NO. 1/1

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated

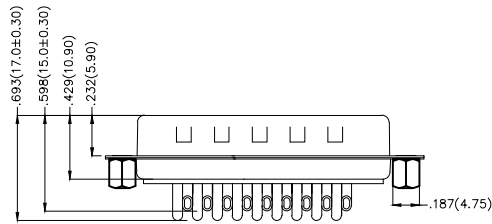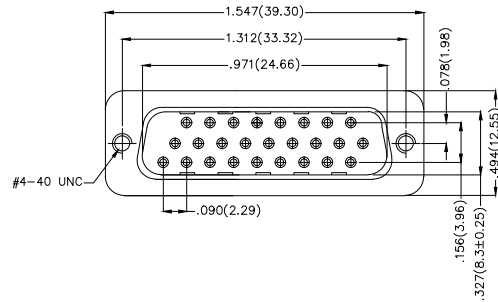

Ordering Information

FDB 26 04 - M0 W S 3 XX XX X D  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 04	4   Type M0-Male	5   Assembly Layout W-Welding Type	6   Entry Angle S-180° Vertical
7   Plating 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type D-D Type	



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-M0WS3XXXXXD	ITEM NO. FDB2604	 3K-KAMING
	DESIGN UNITS Inch (metric)	X.X±.012(0.30) X.X±.008(0.20)	X.±5° X.±2°	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male	
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX±1° .XXX±0.5°	DRAWN BY CHERRY	DATE 28/JUN/13	REV 0	SHEET NO. 1/1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated

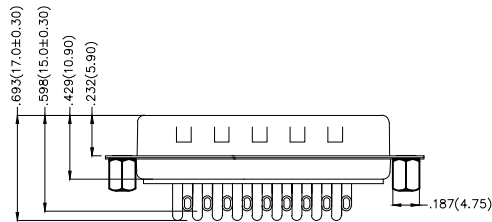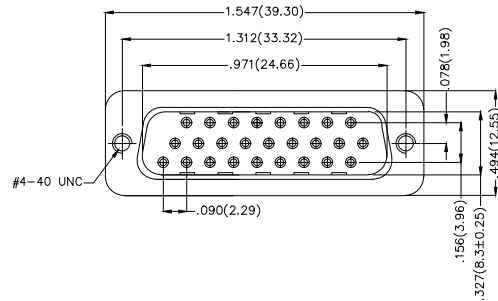

Ordering Information

FDB 26 04 - M0 W S 3 XX XX X E  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 04	4   Type M0-Male	5   Assembly Layout W-Welding Type	6   Entry Angle S-180° Vertical
7   Plating 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type E-E Type	



THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-M0WS3XXXXXE	ITEM NO. FDB2604	 3K-KAMING®
	DESIGN UNITS Inch (metric)	X.X±.012(0.30) X.X±.008(0.20)	X.±5° .X±2°	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male	
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX±1° .XXX±0.5°	DRAWN BY CHERRY	DATE 28/JUN/13	REV 0	SHEET NO. 1/1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							