

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD






**SPECIFICATIONS**

**Electrical**

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

**Material and plating**


Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated

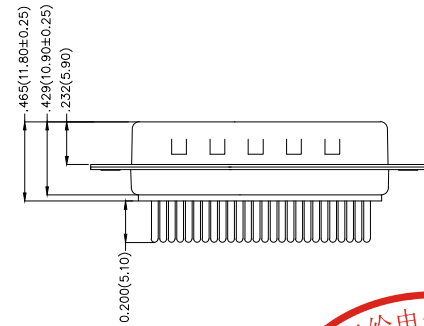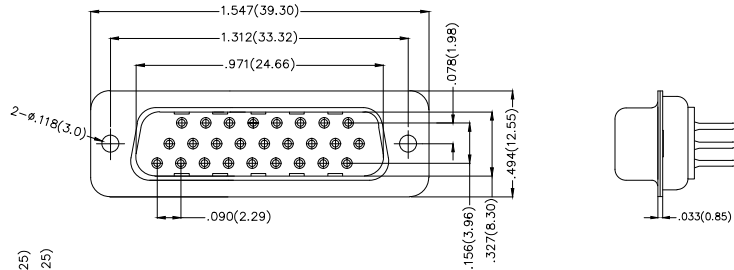

**Ordering Information**

FDB 26 05 - M0 D S X XX XX X A  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 05	4   Type M0-Male	5   Assembly Layout D-DIP	6   Entry Angle S-180° Vertical
7   Plating 1-Gold Plated 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type A-A Type	




THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2605-MODSXXXXXXA	ITEM NO. FDB2605	
	DESIGN UNITS Inch (metric)	X.X±0.012(0.30) X'±5"	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male		
SCALE 5:1	SIZE A4	X.XX±.006(0.15) .XX'±1"	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F

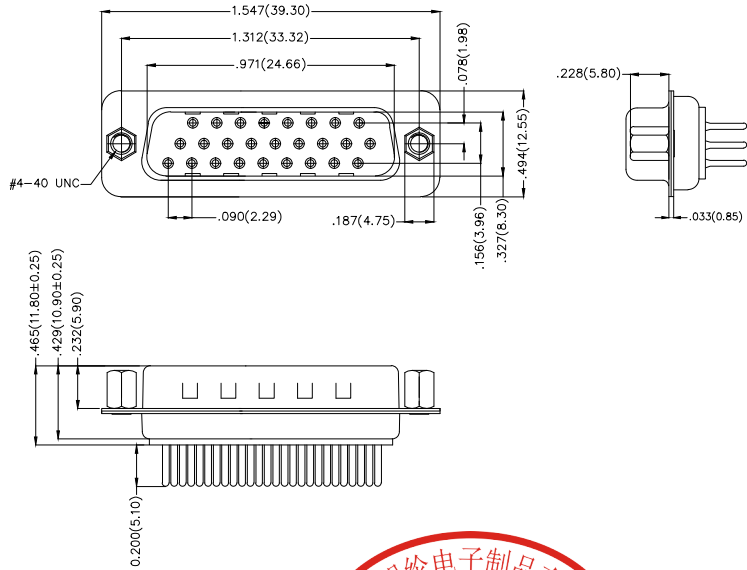

**SPECIFICATIONS**

**Electrical**

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range—Operating: -55°C~+105°C


**Material and plating**

Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated



**Ordering Information**

FDB 26 05 — M0 D S X XX XX X B  
1 2 3 4 5 6 7 8 9 10 11



Recommended P.C. Board Layout

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 05	4   Type M0-Male	5   Assembly Layout D-DIP	6   Entry Angle S-180° Vertical
7   Plating 1-Gold Plated 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type B-B Type	

<p>THIRD ANGLE PROJECTION</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p>		<p>APPROVE BY FRANK</p>	<p>DATE 28/JUN/13</p>	<p>PART NO. FDB2605-MODSXXXXXXB</p>	<p>ITEM NO. FDB2605</p>	<p>3K-KAMING®</p>	
	<p>DESIGN UNITS Inch (metric)</p>	<p>X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)</p>	<p>X.±5" X.±2" .XX±1" .XXX±0.5"</p>	<p>CHECKED BY JACOB</p>	<p>DATE 28/JUN/13</p>	<p>TITLE D-SUB connector 26 Circuits 180° Vertical Male</p>		<p>REV 0</p>
<p>SCALE 5:1</p>	<p>SIZE A4</p>		<p>DRAWN BY CHERRY</p>	<p>DATE 28/JUN/13</p>	<p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG JUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>			

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

Material and plating


Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated

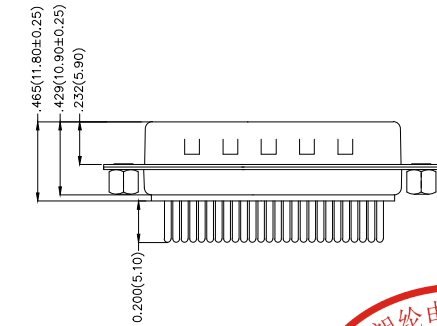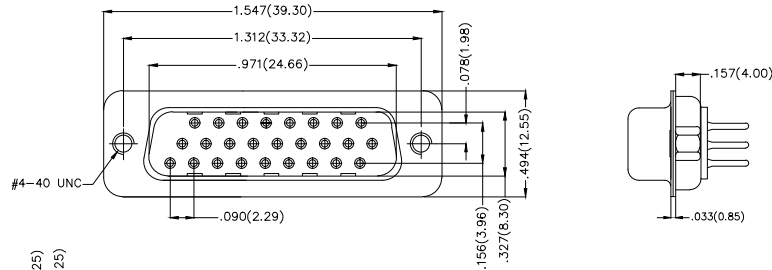

Ordering Information

FDB 26 05 - M0 D S X XX XX X C  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 05	4   Type M0-Male	5   Assembly Layout D-DIP	6   Entry Angle S-180° Vertical
7   Plating 1-Gold Plated 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type C-C Type	

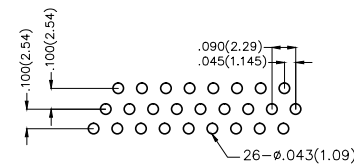

Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED) X.±.012(0.30) X.±5" X.X±.008(0.20) X.±2" X.XX±.006(0.15) .XX±1" X.XXX±.004(0.10) .XXX±0.5"		APPROVE BY FRANK CHECKED BY JACOB DRAWN BY CHERRY	DATE 28/JUN/13 DATE 28/JUN/13 DATE 28/JUN/13	PART NO. FDB2605-MODSXXXXXXC ITEM NO. FDB2605	 3K-KAMING® REV 0 SHEET NO. 1/1	
	TITLE D-SUB connector 26 Circuits 180° Vertical Male				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD





**SPECIFICATIONS**

**Electrical**

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

**Material and plating**


Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated

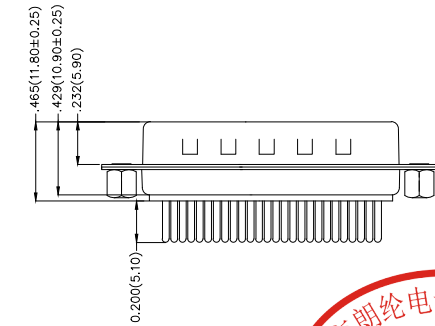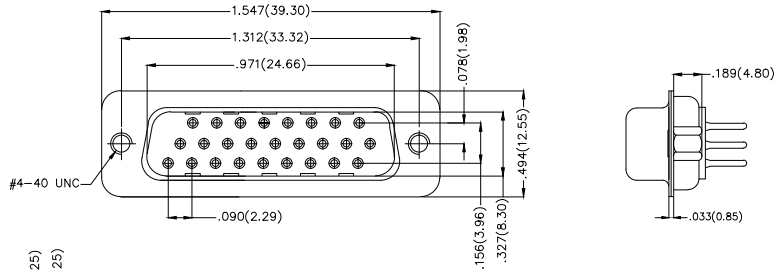

**Ordering Information**

FDB 26 05 - M0 D S X XX XX X D  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 05	4   Type M0-Male	5   Assembly Layout D-DIP	6   Entry Angle S-180° Vertical
7   Plating 1-Gold Plated 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type D-D Type	

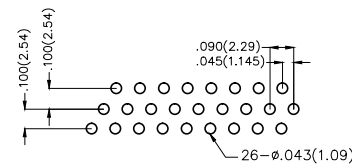

Recommended P.C.Board Layout

<p>THIRD ANGLE PROJECTION</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p>		<p>APPROVE BY FRANK</p>	<p>DATE 28/JUN/13</p>	<p>PART NO. FDB2605-MODSXXXXXXD</p>	<p>ITEM NO. FDB2605</p>	<p>3K-KAMING®</p>	
	<p>DESIGN UNITS Inch (metric)</p>	<p>X.±0.012(0.30)</p>	<p>X.±5'</p>	<p>CHECKED BY JACOB</p>	<p>DATE 28/JUN/13</p>	<p>TITLE D-SUB connector 26 Circuits 180° Vertical Male</p>		<p>REV 0</p>
<p>SCALE 5:1</p>	<p>SIZE A4</p>	<p>X.XX±0.006(0.15)</p>	<p>.XX±1'</p>	<p>DRAWN BY CHERRY</p>	<p>DATE 28/JUN/13</p>	<p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>		

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



**SPECIFICATIONS**

**Electrical**

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

**Material and plating**


Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated

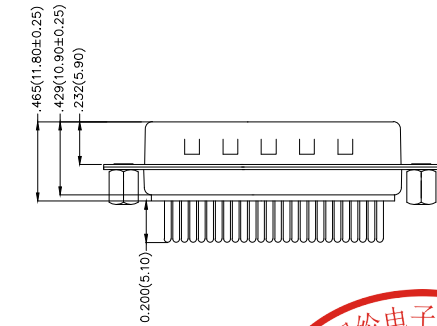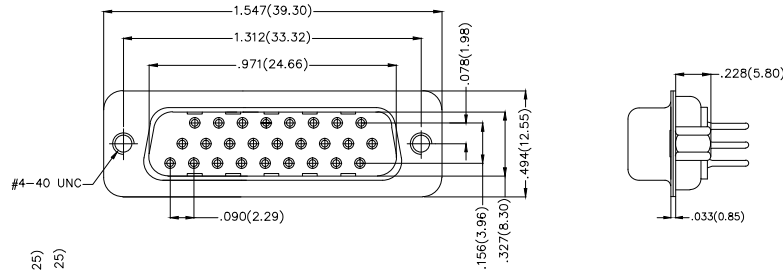

**Ordering Information**

FDB 26 05 - M0 D S X XX XX X E  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 05	4   Type M0-Male	5   Assembly Layout D-DIP	6   Entry Angle S-180° Vertical
7   Plating 1-Gold Plated 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type E-E Type	

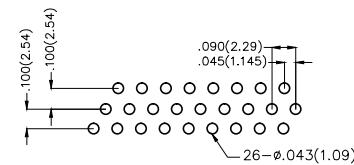

Recommended P.C.Board Layout

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2605-MODSXXXXXXE	ITEM NO. FDB2605	
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.±5'	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male		
SCALE 5:1	SIZE A4	X.XX±.006(0.15) .XX±1'	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC  
Voltage Rating: 250V AC(rms)/DC  
Contact Resistance: 25 mΩ Max  
Insulation Resistance: 1000 MΩ Min  
Withstanding Voltage: 500V AC r.m.s  
Temperature Range-Operating: -55°C~+105°C

Material and plating


Housing: PBT UL 94V-0  
Contact: Copper Alloy/  
Selective gold in contact area, tin on tail  
Shell: SPCC/ Nickel Plated  
Screws: Copper Alloy/ Nickel Plated  
Board Lock: Copper Alloy/ Nickel Plated

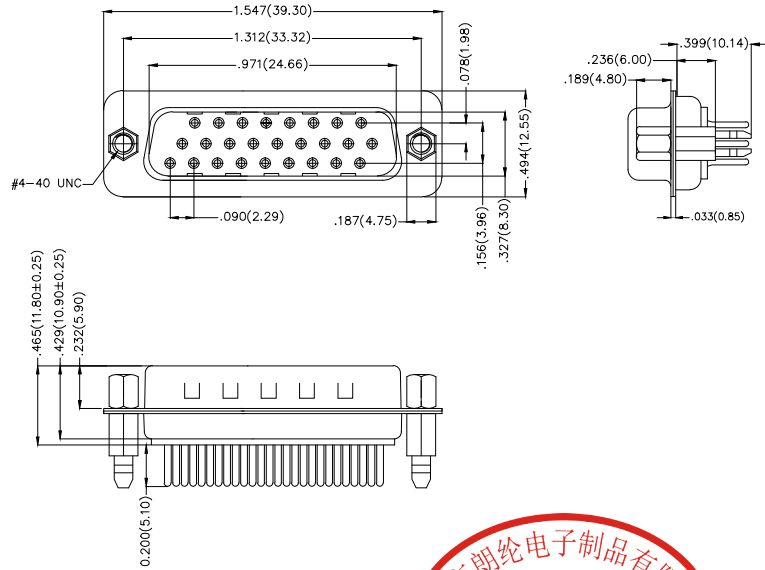

Ordering Information

FDB 26 05 - M0 D S X XX XX X F  
1 2 3 4 5 6 7 8 9 10 11

1   Category FDB- D-SUB Connector	2   Circuits 26-26 Circuits	3   Distinction No. 05	4   Type M0-Male	5   Assembly Layout D-DIP	6   Entry Angle S-180° Vertical
7   Plating 1-Gold Plated 3-Selective gold in contact area, tin on tail	8   Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9   Color-Resin K6-Black U1-Blue	10   Packaging K-Tray L-Tube	11   Distinction Type F-F Type	

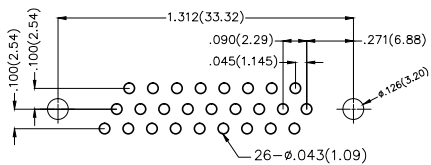

Recommended P.C.Board Layout

<p>THIRD ANGLE PROJECTION</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p>		<p>APPROVE BY FRANK</p>	<p>DATE 28/JUN/13</p>	<p>PART NO. FDB2605-MODSXXXXXXF</p>	<p>ITEM NO. FDB2605</p>	<p>3K-KAMING®</p>	
	<p>DESIGN UNITS Inch (metric)</p>	<p>X.±.012(0.30)</p>	<p>X.±5'</p>	<p>CHECKED BY JACOB</p>	<p>DATE 28/JUN/13</p>	<p>TITLE D-SUB connector 26 Circuits 180° Vertical Male</p>		<p>REV 0</p>
<p>SCALE 5:1</p>	<p>SIZE A4</p>	<p>X.XX±.006(0.15)</p>	<p>.XX±1'</p>	<p>DRAWN BY CHERRY</p>	<p>DATE 28/JUN/13</p>	<p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG JUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>		