YMA SERIES (IEC Inlet Filters)





Features

- · General purpose filters with IEC connector providing effective EMI suppression of line to line and line to ground noise.
- · Offer in screw-in & snap-in two versions with fast-on terminal.
- · All parts are approved by UL, CSA and CE
- · Applications comprising Electrical and electronic equipment, Rack mounting equipment, Single-phase power supplies
- · Custom-specific versions are available on request

Technical Specification

Typical electrical schematic

Rated voltage	125/250VAC	A MANITAGE AND A STATE OF THE S		
Rated currents	up to 20A	10		
Operating frequency	50/60Hz	REACH	Ţ	±CY
Hipot rating(Line-to-line)	1450VDC	TCX	L	CY =
Hipot rating(Line-to-ground)	2250VDC	2 o	—1111	
Operating temperature	-25~+85°C			
Safety compliance	UL, CSA, CE			


Filter Selection Table

Part No.	Rated Current (A)	Inductance L(mH)	Capacitance CX(μF)	Capacitance CY(pF)	Output connections
YMA15A1	15				
YMA20A1-MA	20				Fast-on terminal
YMA20A1-MO	20				

Physical Dimensions: (mm)

100K

1M

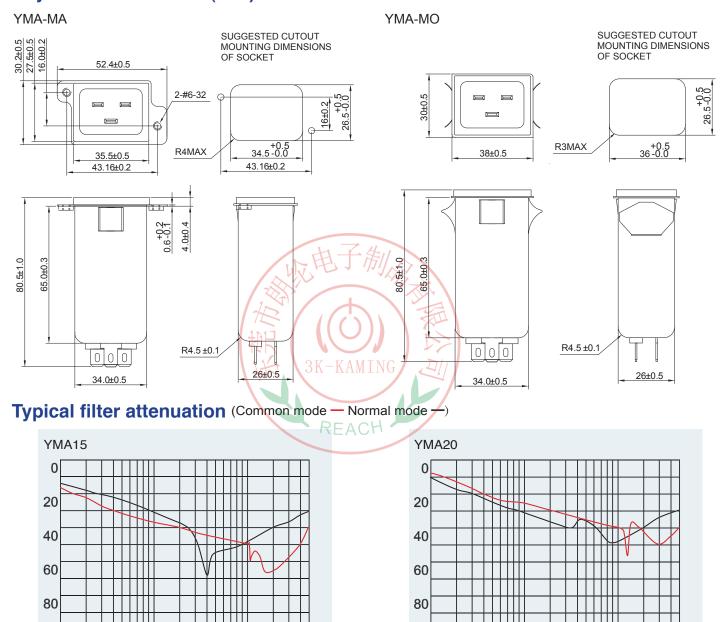

50M

10M

100K

1M

10M

50M