
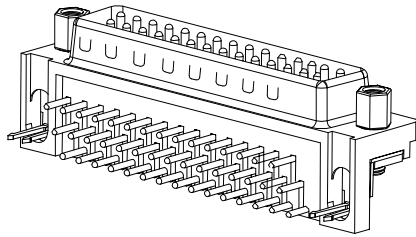


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

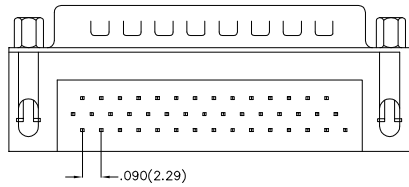



SPECIFICATIONS

Electrical



Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 MΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Operating Temperature: -55°C~+105°C

Material

Housing: PBT 30%G.F UL 94V-0
Contact: Phosphor Bronze Gold/Tin-Plated

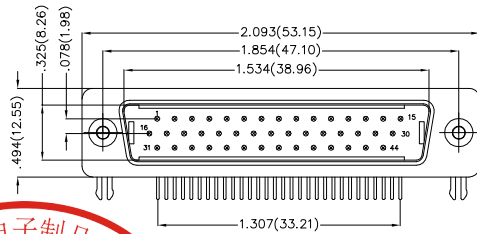

Products Categories: A.B.C.D

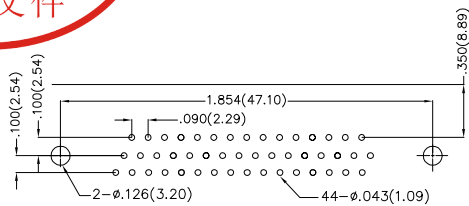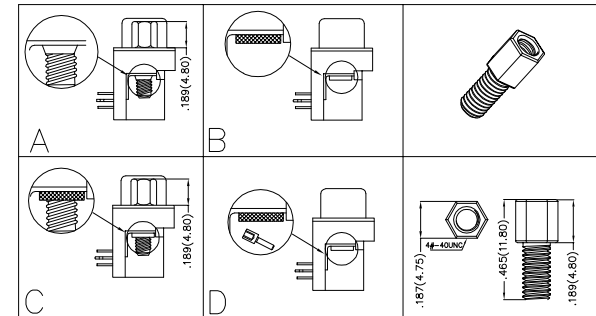

PCB LAYOUT

FDB 44 02 — M0 D B * ** ** K *

1 2 3 4 5 6 7 8 9 10 11

1 Series Name -FDB	2 No. of pins -44	3 Distinction No. -02	4 Type Male-M0	5 Assembly Layout DIP-D	6 Entry Type Bend-B
7 Gold Plating Gold Plated All-1 Tin Plated All-2 Half Gold/Tin -3	8 Thickness of Plating Gold Plating-00 3u"-03..... Custom Plate Available	9 Plastic Colour Black-K6 Blue-U1	10 Packaging PE Tray-K	11 Products Categories A Type-A B Type-B C Type-C D Type-D	

Third Angle Projection UNIT: in(mm)	TOLERANCE (Expect as noted)		APPROVE	Frank	PART NO:		TITLE:	ITEM NO:	
	X.±.012(0.30)	X.'±5'	CHECK	FAN	FDB4402-M0DB*****K*		D-SUB	DB4402	
SCALE: 1:1	X.XX±.006(0.15)	.XX'±1"	DRAWN	Cherry	DATE	13/JUN/11	REQUIRED DOCUMENTS: D-SUB 44Pin Male Series		REV: 0
	X.XXX±.004(0.10)	.XXX'±0.5"							