
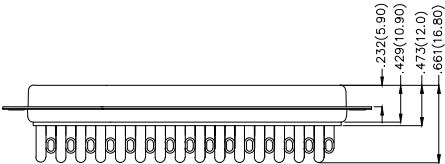



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and plating
Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated

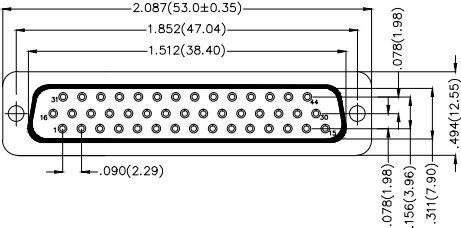



Ordering Information

FDB 44 06 — F0 W S 3 XX XX X A
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 44-44 Circuits	3	Distinction No. 06	4	Type F0-Female	5	Assembly Layout W-Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9	Color-Resin K6-Black U1-Blue	10	Packaging K-Tray L-Tube	11	Distinction Type A-A Type		






		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB4406-FOWS3XXXXXA	ITEM NO. FDB4406		
THIRD ANGLE PROJECTION		X.±.012(0.30)	X.±5"	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 44 Circuits 180° Vertical Female		3K-KAMING	
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X"±2"	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX"±1"						
		X.XXX±.004(0.10)	.XXX"±0.5"						
4		5		6		7		8	

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

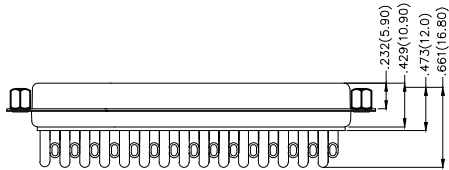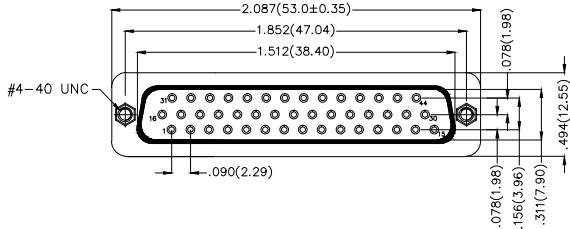

Material and plating
Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated
Screws: Copper Alloy/ Nickel Plated



Ordering Information

FDB 44 06 — F0 W S 3 XX XX X B
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 44-44 Circuits	3	Distinction No. 06	4	Type F0-Female	5	Assembly Layout W-Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9	Color-Resin K6-Black U1-Blue	10	Packaging K-Tray L-Tube	11	Distinction Type B-B Type		




		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB4406-FOWS3XXXXXB	ITEM NO. FDB4406				
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE D-SUB connector 44 Circuits 180° Vertical Female		REV 0		SHEET NO. 1/1	
		X.X±.008(0.20)	.X°±2°	JACOB	28/JUN/13						
		X.XX±.006(0.15)	.XX°±1°	DRAWN BY	DATE						
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX±0.5°	CHERRY	28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
4		5		6		7		8			

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and plating
Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated
Screws: Copper Alloy/ Nickel Plated

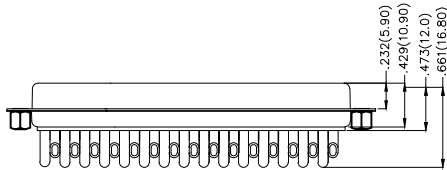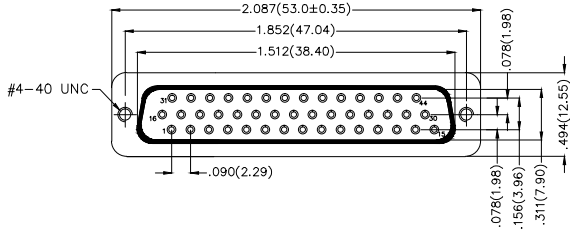



Ordering Information

FDB 44 06 — F0 W S 3 XX XX X C
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 44-44 Circuits	3	Distinction No. 06	4	Type F0-Female	5	Assembly Layout W-Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9	Color-Resin K6-Black U1-Blue	10	Packaging K-Tray L-Tube	11	Distinction Type C-C Type		






		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB4406-FOWS3XXXXXC	ITEM NO. FDB4406				
DESIGN UNITS Inch (metric)		X.±012(0.30)	X'±5"	CHECKED BY	DATE	TITLE D-SUB connector 44 Circuits 180° Vertical Female		REV 0		SHEET NO. 1/1	
		X.X±.008(0.20)	.X'±2"	JACOB	28/JUN/13						
		X.XX±.006(0.15)	.XX'±1"	DRAWN BY	DATE						
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5"	CHERRY	28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
4		5		6		7		8			

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

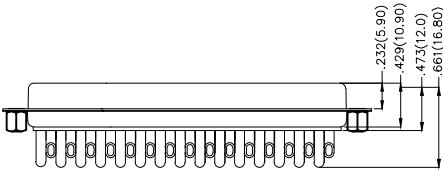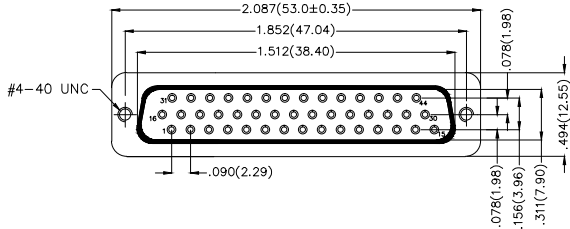

Material and plating
Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated
Screws: Copper Alloy/ Nickel Plated



Ordering Information

FDB 44 06 — F0 W S 3 XX XX X D
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 44-44 Circuits	3	Distinction No. 06	4	Type F0-Female	5	Assembly Layout W-Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9	Color-Resin K6-Black U1-Blue	10	Packaging K-Tray L-Tube	11	Distinction Type D-D Type		




 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB4406-FOWS3XXXXXD	ITEM NO. FDB4406	 3K-KAMING	
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE D-SUB connector 44 Circuits 180° Vertical Female		REV 0	SHEET NO. 1/1
		X.X±.008(0.20)	.X°±2°	JACOB	28/JUN/13				
		X.XX±.006(0.15)	.XX°±1°	DRAWN BY	DATE				
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX±0.5°	CHERRY	28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
4		5		6		7		8	

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

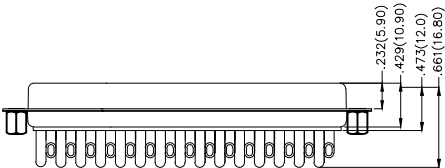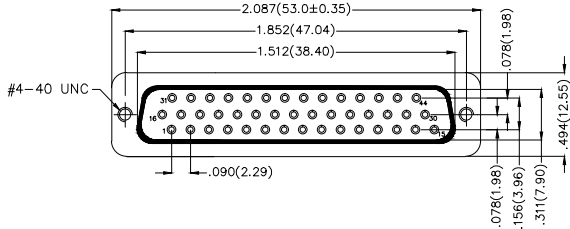

Material and plating
Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated
Screws: Copper Alloy/ Nickel Plated



Ordering Information

FDB 44 06 — F0 W S 3 XX XX X E
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 44-44 Circuits	3	Distinction No. 06	4	Type F0-Female	5	Assembly Layout W-Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9	Color-Resin K6-Black U1-Blue	10	Packaging K-Tray L-Tube	11	Distinction Type E-E Type		

		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB4406-FOWS3XXXXXE	ITEM NO. FDB4406		
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X'±5"	CHECKED BY	DATE	TITLE D-SUB connector 44 Circuits 180° Vertical Female		3K-KAMING	
		X.X±.008(0.20)	X'±2"	JACOB	28/JUN/13				
		X.XX±.006(0.15)	.XX'±1"	DRAWN BY	DATE				
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5"	CHERRY	28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
4		5		6		7		8	