

A

B

C

D

E

F

1

2

3





4

5

6

7

8

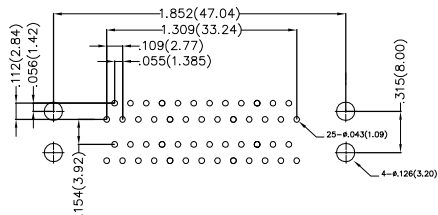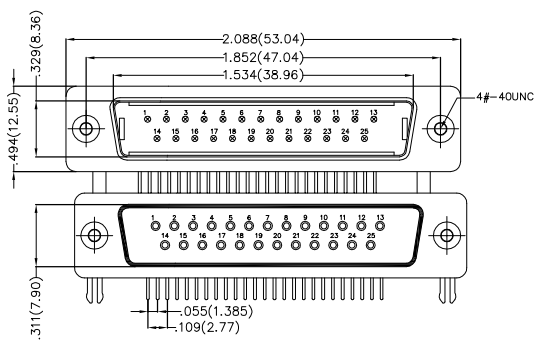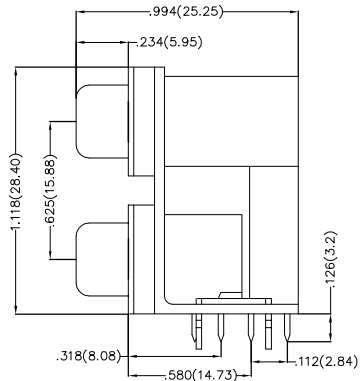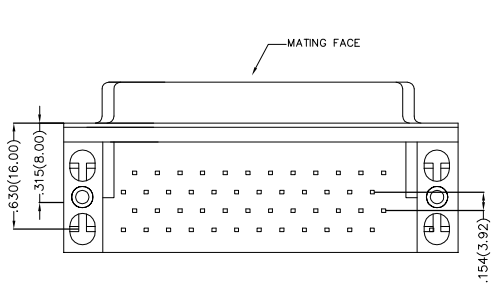

PCB LAYOUT




SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 MΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Operating Temperature: -55℃~+105℃
Material
Housing: PBT 30%G.F UL 94V-0
Contact: Phosphor Bronze Gold/Tin-Plated



Products Categories: A.B.C

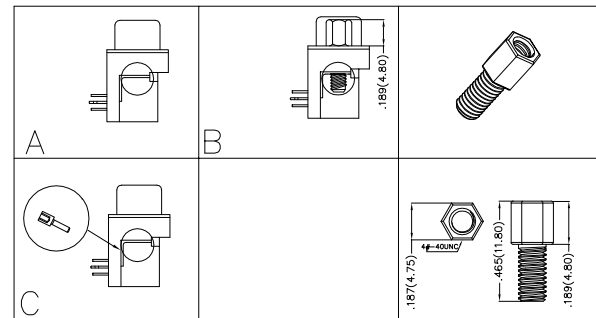

FDB 50 02 — MF D B * ** ** K *

1	Series Name	2	No. of pins	3	Distinction No.	4	Type	5	Assembly Layout	6	Entry Type
	-FDB		-50		-02		Male+Female-MF		DIP-D		Bend-B
7	Gold Plating	8	Thickness of Plating	9	Plastic Colour	10	Packaging	11	Products Categories		
	Gold Plated All-1 Tin Plated All-2 Half Gold/Tin -3		Gold Plating-00 3u"-03..... Custom Plate Available		Black-K6 Blue-U1		PE Tray-K		A Type-A B Type-B C Type-C		

 Third Angle Projection	TOLERANCE (Expect as noted)		APPROVE	Frank	PART NO:		TITLE:	ITEM NO:	 3K-KAMING®
UNIT: in(mm)	X.±.012(0.30)	X'±5'	CHECK	FAN	FDB5002-MFDB*****K*		D-SUB	DB5002	
SCALE: 1:1	X.XX±.006(0.15)	.XX'±1'			DRAWN	Cherry	DATE	13/JUN/11	REQUIRED DOCUMENTS:
	X.XXX±.004(0.10)	.XXX'±0.5'	D-SUB 25Pin Male+25Pin Female Series						