

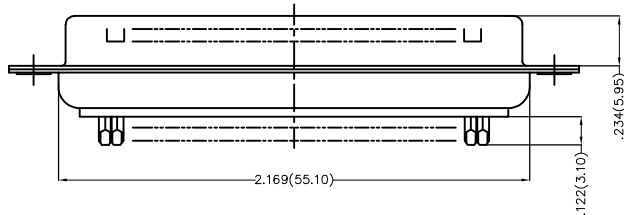




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 30 MΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Operating Temperature: -55°C~+105°C
Material
Housing: PBT 30%G.F UL 94V-0
Contact: Phosphor Bronze Gold/Tin-Plated

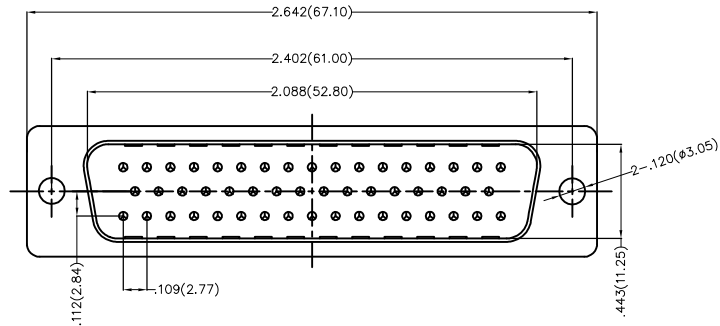

Ordering Informaion

FDB 50 05 — M0 W S * ** ** K
1 2 3 4 5 6 7 8 9 10

1	Series Name	2	No. of pins	3	Distinction No.	4	Type	5	Assembly Layout	6	Entry Type
	-FDB		-50		-05		Male-M0		Welding Type-W		Straight-S
7	Gold Plating	8	Thickness of Plating	9	Plastic Colour	10	Packaging				
	Gold Plated All-1		Gold Plating-00		Black-K6		PE Tray-K				
	Tin Plated All-2		3u"-03.....		Blue-U1						
	Half Gold/Tin -3		Custom Plate Available								

 Third Angle Projection	TOLERANCE (Expect as noted)		APPROVE	Frank	PART NO:		TITLE:	ITEM NO:	 3K-KAMING®
UNIT: in(mm)	X.±.012(0.30)	X.*±5°	CHECK	FAN	FDB5005—MOWS*****K		D—SUB	DB5005	
	X.X±.008(0.20)	.X*±2°					REQUIRED DOCUMENTS:		
SCALE: 1:1	X.XX±.006(0.15)	.XX*±1°	DRAWN	Cherry	DATE	13/JUN/11	D—SUB 50Pin Male Series		
	X.XXX±.004(0.10)	.XXX±0.5°							