


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 30 MΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Operating Temperature: -55℃~+105℃
Material
Housing: PBT 30%G.F UL 94V-0
Contact: Phosphor Bronze Gold/Tin-Plated

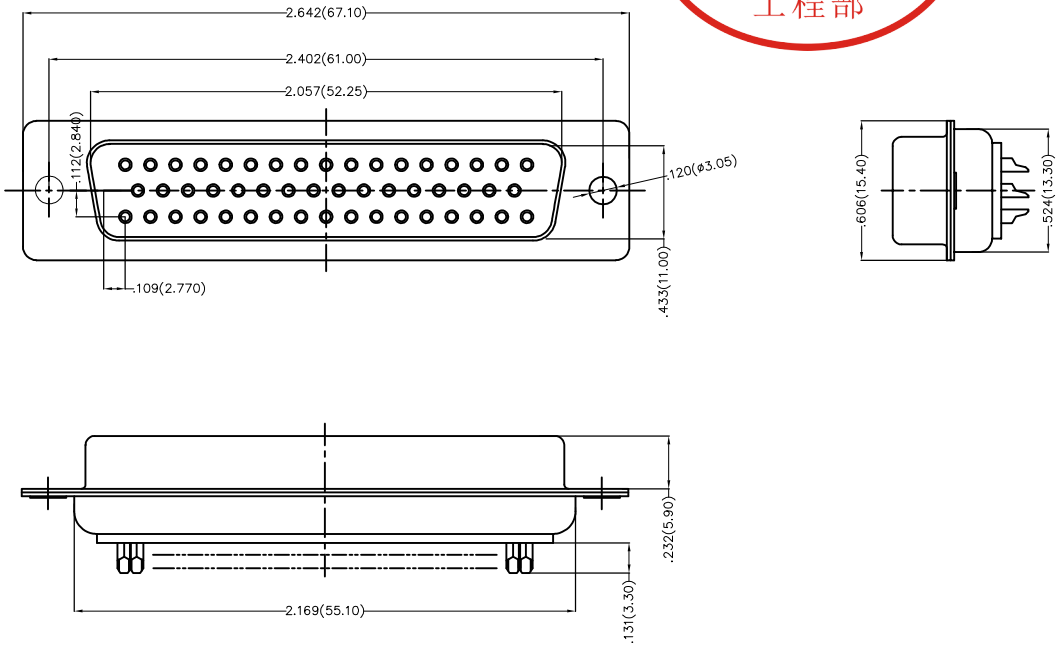

Ordering Informaion

FDB 50 06 — F0 W S * ** ** K
1 2 3 4 5 6 7 8 9 10

1	Series Name -FDB	2	No. of pins -50	3	Distinction No. -06	4	Type Female-F0	5	Assembly Layout Welding Type-W	6	Entry Type Straight-S
7	Gold Plating Gold Plated All-1 Tin Plated All-2 Half Gold/Tin -3	8	Thickness of Plating Gold Plating-00 3u"-03..... Custom Plate Available	9	Plastic Colour Black-K6 Blue-U1	10	Packaging PE Tray-K				



Third Angle Projection UNIT: in(mm) SCALE: 1:1	TOLERANCE (Expect as noted)		APPROVE	Frank	PART NO:		TITLE:	ITEM NO:	
	X.±0.12(0.30)	X.'±5'	CHECK	FAN	FDB5006-F0DS*****		D-SUB	DB5006	
	X.X±.008(0.20)	X.'±2'	DRAWN	Cherry	DATE	13/JUN/11	REQUIRED DOCUMENTS: D-SUB 50Pin Female Series		REV: 0