

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATIONS

Electrical

- 1.Current Rating: 5A AC(rms)/DC
- 2.Voltage Rating: 250V AC(rms)/DC
- 3.Contact Resistance: 25 mΩ Max
- 4.Insulation Resistance:1000 MΩ MIN /DC 500V
- 5.Withstanding Voltage:500V AC r.m.s
- 6.Temperature Range—Operating: -55°C~+105°C

Material and Finish

- 1.Housing: PBT+30%GF UL94V-0
- 2.Contact:Brass/Gold Flash Over Tin Or Gold Plated Or Tin Plated
- 3.Shell: Steel/Nickel Plated

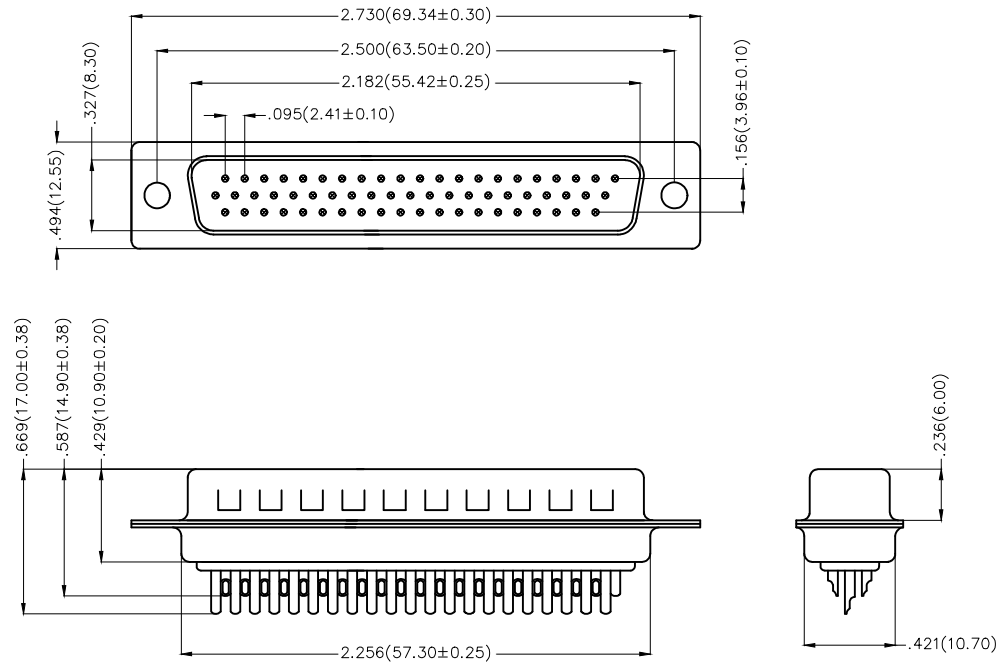

Ordering Information

FDB 62 03 — M0 W S X XX K6 K A
1 2 3 4 5 6 7 8 9 10 11

1 Series Name FDB- D-SUB	2 Circuits 62	3 Distinction No. 03	4 Type M0—Male	5 Assembly Layout W—Welding	6 Entry Type S—Top entry type
7 Plating 1—Gold Plated 3—Half Gold/Tin	8 Thickness of Plating 00—Gold Flash 01—1u" 03—3u" Custom Plate Available	9 Plastic Colour K6—Black	10 Packaging K—PE Tray	11 Products Categories A—Type A	

	GENERAL TOLERANCES (UNLESS SPECIFIED)	APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FDB6203—MOWSXXXK6KA	ITEM NO. FDB6203		
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.'±5' X.X±.008(0.20) .X'±2" X.XX±.006(0.15) .XX'±1" X.XXX±.004(0.10) .XXX'±0.5'	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE D-SUB 62PIN MALE CONN	REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4		DRAWN BY KATE	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		