

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Electrical

- 1.Current Rating: 5A AC(rms)/DC
- 2.Voltage Rating: 250V AC(rms)/DC
- 3.Contact Resistance: 25 mΩ Max
- 4.Insulation Resistance:1000 MΩ MIN /DC 500V
- 5.Withstanding Voltage:500V AC r.m.s
- 6.Temperature Range—Operating: -55°C~+105°C

Material and Finish

- 1.Housing: PBT+30%GF UL94V-0
- 2.Contact:Brass/Gold Flash Over Tin Or Gold Plated Or Tin Plated
- 3.Shell: Steel/Nickel Plated

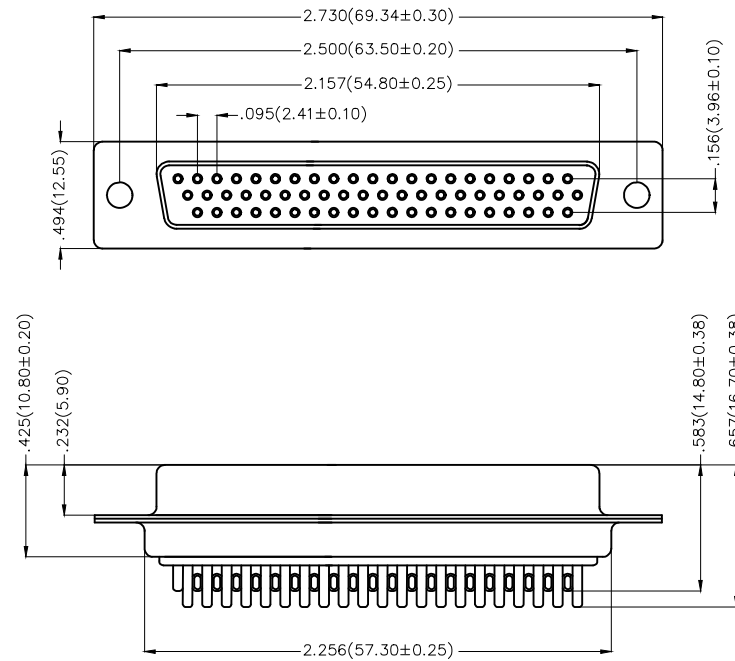

Ordering Information

FDB 62 04 — F0 W S X XX K6 K A
1 2 3 4 5 6 7 8 9 10 11

1 Series Name FDB- D-SUB	2 Circuits 62	3 Distinction No. 04	4 Type F0-Female	5 Assembly Layout W-Welding	6 Entry Type S-Top entry type
7 Plating 1-Gold Plated 3-Half Gold/Tin	8 Thickness of Plating 00-Gold Flash 01-1u" 03-3u" Custom Plate Available	9 Plastic Colour K6-Black	10 Packaging K-PE Tray	11 Products Categories A-Type A	

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FDB6204-FOWSXXXK6KA	ITEM NO. FDB6204	 3K-KAMING	
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X'±5°	CHECKED BY	DATE	TITLE D-SUB 62PIN FEMALE CONN			
		X.X±.008(0.20)	.X'±2°	CHERRY	18/JUN/13			REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	.XXX'±0.5°	KATE	18/JUN/13				

