
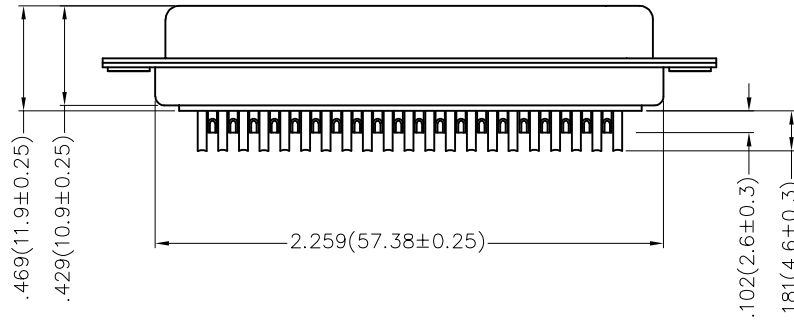
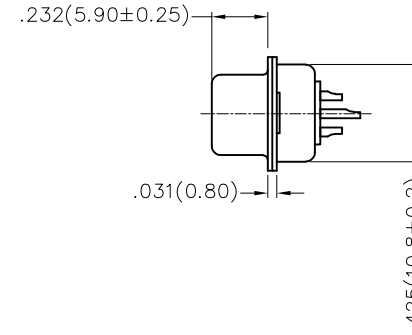


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

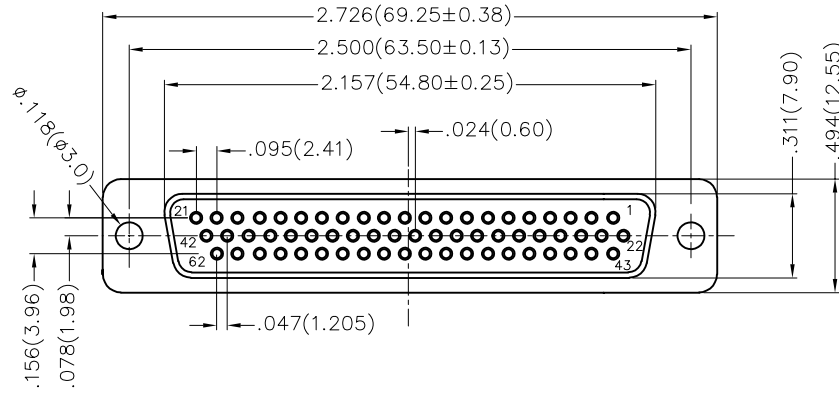

Ordering Information

FDM 62 11 — FO W S 1 XX XX X
1 2 3 4 5 6 7 8 9 10

Materials And Finish
 Shell: Spcc Material, Front Nickel Plated 80μ" Min
 Back Shell: SPCC, Tin Plated 100μ" Min
 Insulator: Glass Filled Thermoplastic, UL 94V-0
 Contact Material: Brass /Gold Plated
Electrical Characteristic
 Current Rating: 5.0A
 Voltage Rating: 300V
 Contact Resistance: 30mΩ Max
 Dielectric Withstanding Voltage :1000V AC r.m.s
 Insulation Resistance: 5000 MΩ Min.
 Temperature Range—Operating: -55°C ~ +105°C

1 Category FDM—Machined pin D—SUB connector	2 Circuits 62	3 Distinction No. 11	4 Type FO—Female	5 Assembly Layout W—Welding Type
6 Entry Angle S—180° Vertical	7 Plating 1—Gold Plated	8 Thickness of Plating 01—1μ" 03—3μ" Custom plate available	9 Color—Resin W1—White K6—Black	10 Packaging K—Tray L—Tube

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 16/SEP/19	PART NO. FDM6211-FOWS1XXXXX	ITEM NO. FDM6211-F0	 3K-KAMING®	
		X.±.012(0.30)	X.'±5'	CHECKED BY CHERRY	DATE 16/SEP/19	TITLE Machined pin D-SUB connector 180° Vertical Male			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X.'±2'	DRAWN BY ZOEY	DATE 16/SEP/19	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A<	X.XX±.006(0.15)	.XX'±1'						
		X.XXX±.004(0.10)	.XXX±0.5'						
4		5		6		7		8	