

Rating:

- CQC 6(4)A 250V AC T85
- 6A/125A 250VAC
- UL cUL 10A 125V AC/6A 250V AC
- VDE 6(4)A 250V AC T85
- KC 6(4)A 250V AC T85

Circuit Diagram: 2P ON-OFF

Terminal Strength: $\geq 80N$

Electrical life: ≥ 10000 cycles




Withstand Voltage: Withstand Voltage:1800VAC 1min

Terminals to Button:3000VAC 1min

Leakage Current: 1mA

Current resistance: $\leq 50m\Omega$ (initial)

Insulation resistance: $\geq 100M\Omega$

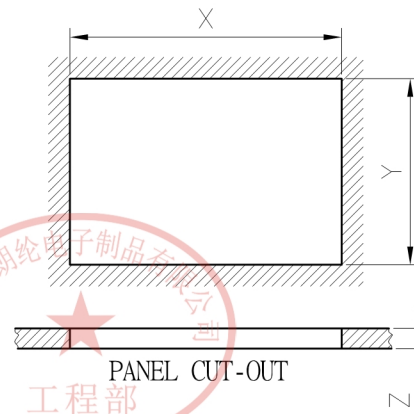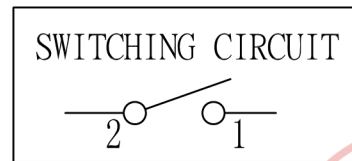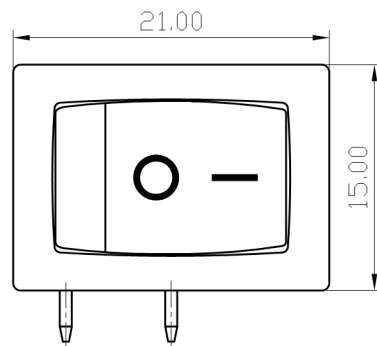

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.90~13.10	18.90~19.10
1.25~2.00	12.90~13.10	19.10~19.20
2.00~3.00	12.90~13.10	19.30~19.40

A4				普通公差:		东莞市朗纶电子制品有限公司 Dongguan langlun electronic products Co., Ltd							
A3				COMMON TOLERANCE:		单位	mm	投影		品名	跷板开关	比例	Free
A2				UP TO 5		±0.20	UNIT	PROJECTED	核对	吴路方	型号	3K601B-1010013BB	
A1				ABOVE 5 TO 30		±0.30	绘图	朱文林	CHECKED BY	周培雷	图号	3K601B-1010013BB	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	2012.11.14	核准	周培雷	DWG NO.	3K601B-1010013BB		