

Rating:  
 CQC 16(4)A 250V AC T85  
 UL cUL 16A 125V AC/16A 250V AC T125  
 VDE 16(4)A 250V AC T85

Circuit Diagram: 3P ON-ON

Terminal Strength:  $\geq 80N$




Electrical life:  $\geq 10000$  cycles

Withstand Voltage: Withstand Voltage:1800VAC 1min  
 Terminals to Button:3000VAC 1min

Leakage Current: 1mA


Current resistance:  $\leq 50m\Omega$ (initial)

Insulation resistance:  $\geq 100M\Omega$

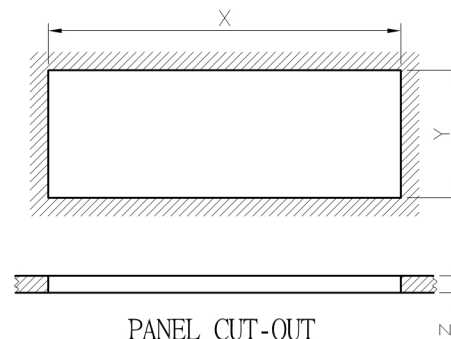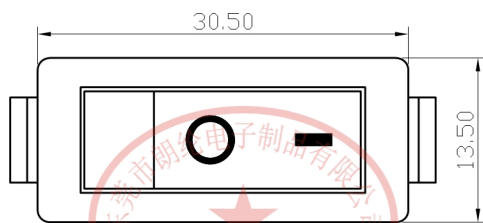

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	10.50~10.70	28.9~29.1
1.25~2.00	10.50~10.70	29.1~29.2
2.00~3.00	10.50~10.70	29.2~29.3

工程部

A4				普通公差:	 <b>东莞市朗纶电子制品有限公司</b> <b>Dongguan langlun electronic products Co., Ltd</b>								
A3				COMMON TOLERANCE:		单位	mm	投影		品名	跷板开关	比例	2:1
A2				UP TO 5		$\pm 0.20$	UNIT		核 对	吴路方	型号	3K606-1020011CBB	
A1				ABOVE 5 TO 30		$\pm 0.30$	绘图	朱文林	核 对	吴路方	MODEL NO.	3K606-1020011CBB	
				ABOVE 30	$\pm 0.50$	日期	2012.11.14	核 准	周培雷	图号	3K606-1020011CBB		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	$\pm 5^\circ$	DATE		APPROVAL BY		DWG NO.			