




RoHS  
Compliant  
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |

## DIMENSIONS

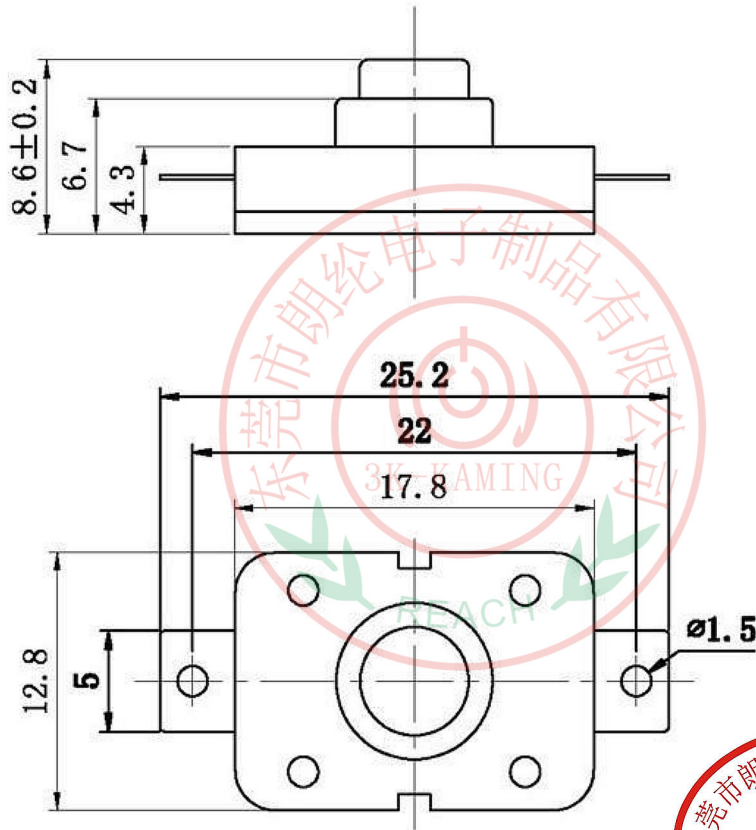

## ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

|    |                                 |                                |
|----|---------------------------------|--------------------------------|
| 1  | 额定负荷Rated laod                  | AC 250V 1.5A                   |
| 2  | 接触电阻Contact resistance          | $\leq 100\text{m}\Omega$       |
| 3  | 绝缘电阻Insulation resistance       | $\geq 100\text{M}\Omega$       |
| 4  | 耐压Witstand Voltage              | AC 500V (50HZ) /1min           |
| 5  | 电器寿命Life                        | $\geq 20000$                   |
| 6  | 动作力度Strength of action          | $800 \pm 50\text{gf}$          |
| 7  | 环境温度The environment temperature | $-15 \sim 75^\circ\text{C}$    |
| 8  | 相对湿度Relative humidity           | $\leq 95\% (40^\circ\text{C})$ |
| 9  |                                 |                                |
| 10 |                                 |                                |
| 11 |                                 |                                |

| NO | 配件Accessories              | 材料名称Material          | 产地Place of origin       | 备注Note                | WITHIN 1.5mm: $\pm 0.1\text{mm}$ | UNITS mm | 东莞市朗纶电子制品有限公司<br>Dongguan langlun electronic products Co., Ltd |
|----|----------------------------|-----------------------|-------------------------|-----------------------|----------------------------------|----------|--|
| 1  | 上盖/底座Topcover/base         | PA66                  | 进口/国产Imports / domestic | 黑或白Black or white     | OVER 1.5mm: $\pm 0.2\text{mm}$   | MAT'L    |  |
| 2  | 按钮/内件Button/interior       | POM                   | 进口/国产Imports / domestic | 黑或白Black or white     |                                  | SEE NOTE | PART NO.: 3K-8-108-23A   |
| 3  | 端子/拉伸件Terminals/stretchers | 黄铜Brass               | 进口/国产Imports / domestic | 表层镀银Surface of silver |                                  | FINISH   | DWG NO.: 3K-8-108-23A  |
| 4  | 弹簧spring                   | 碳素钢丝Carbon steel wire | 进口/国产Imports / domestic | 表层镀银Surface of silver |                                  | SEE NOTE | DR: Ricky 2015/03/23   |
| 5  | 弹片 Shrapnel                | 磷铜Phosphor copper     | 进口/国产Imports / domestic | 表层镀银Surface of silver |                                  | Q'TY     | CHKD: Ricky 2015/03/23   |
| 6  | 钩针 Crochet                 | 黄铜 Brass              | 进口/国产Imports / domestic | 表层镀银Surface of silver |                                  |          | APPD:<br>SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING         |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3K-KAMING(LANG LUN) INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3K-KAMING(LANG LUN) INC.