
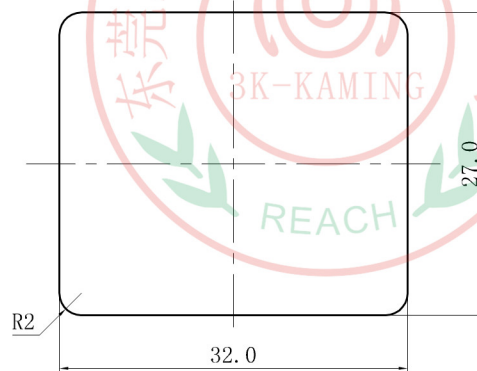


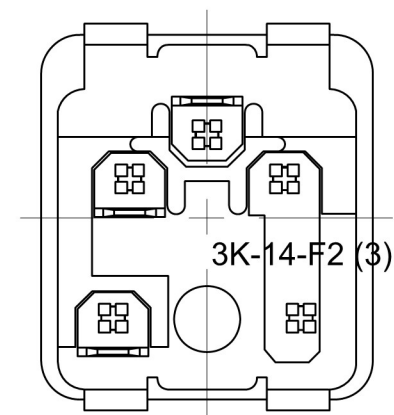

PANEL CUT-OUT

Rating :

15A 250V AC	T105	UL	cUL
10A 250V AC	VDE	3C	KC

Insert And Extract Force: 1.36kgf~6.8kgf

Terminal Strength: $\geq 80\text{N}$

Operating Life: ≥ 5000 cycles

Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min
terminals to Base:3750V AC (50-60Hz)1min
Leakage Current : 1mA

Insulation Resistance: $\geq 100\text{M}\Omega$ 500V DC



A4		东莞市朗纶电子制品有限公司 受控文件			普通公差	 3K-KAMING	东莞市朗纶电子制品有限公司								
A3					COMMON TOLERANCE :		Dongguan langlun electronic products Co., Ltd								
A2					UP TO 5		±0.20	单位	mm	投影		品名	Ac Inlet C14型	比例	Free
					ABOVE 5 TO 30		±0.30	UNIT				PRODUCT NAME		SCALE	
A1					ABOVE 30		±0.50	绘图	吴瑜	核对		型号	3K-14-F2 (3)		
						DRAWN BY		CHECKED BY		MODEL NO.					
REV.	DATE	REVISION DESCRIPTION	ISSUE		ANGULAR	±5°	日期	2009.06.16	核准		图号	14F2			
							DATE		APPROVAL BY		DWG NO.				