

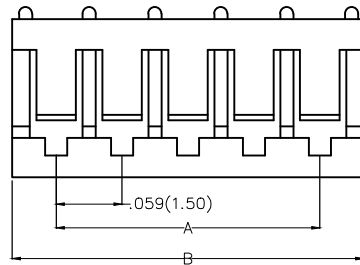


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes

1. Material: PA66 UL94V-2
2. Temperature Range-Operating: -25C° ~ +85C°
3. Applicable Terminal: FT15002



Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B
2	FHG15002-S02M2W1B	.059(1.50)	.142(3.60)
3	FHG15002-S03M2W1B	.118(3.00)	.201(5.10)
4	FHG15002-S04M2W1B	.177(4.50)	.260(6.60)
5	FHG15002-S05M2W1B	.236(6.00)	.319(8.10)
6	FHG15002-S06M2W1B	.295(7.50)	.378(9.60)
7	FHG15002-S07M2W1B	.354(9.00)	.437(11.10)
8	FHG15002-S08M2W1B	.413(10.50)	.496(12.60)
9	FHG15002-S09M2W1B	.472(12.00)	.555(14.10)
10	FHG15002-S10M2W1B	.531(13.50)	.614(15.60)
11	FHG15002-S11M2W1B	.591(15.00)	.673(17.10)
12	FHG15002-S12M2W1B	.650(16.50)	.732(18.60)
13	FHG15002-S13M2W1B	.709(18.00)	.791(20.10)
14	FHG15002-S14M2W1B	.768(19.50)	.850(21.60)
15	FHG15002-S15M2W1B	.827(21.00)	.909(23.10)

Ordering Information

FHG 150 02 — S XX M 2 W1 B
 1 2 3 4 5 6 7 8 9

1	Category FHG-Housing	2	Series Number 150-Pitch1.50mm	3	Distinction No. 02	4	Row Option S-Single row		
5	Circuits XX	6	Type M-Male	7	Material-Resin 2-PA66	8	Color-Resin W1-White	9	Packaging B-PE Bag



 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FHG15002-SXXM2W1B	ITEM NO. FHG15002	 3K-KAMING	
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.±5'	CHECKED BY JACOB	DATE 25/JUN/13	TITLE Wire to Board Pitch 1.5mm(Housing)		REV 0
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX±1'	DRAWN BY CHERRY	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DONG GUAN LANG LUN(3K-KAMING) ELECTRONIC PRODUCTS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		